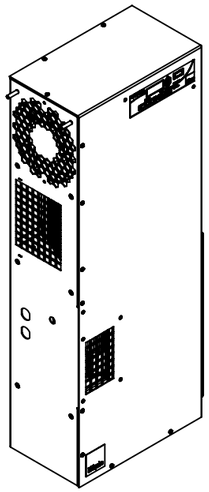

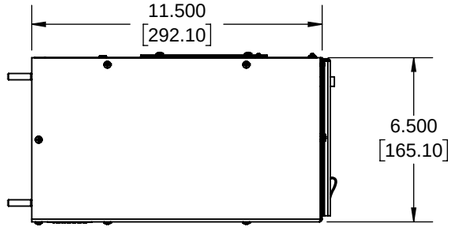

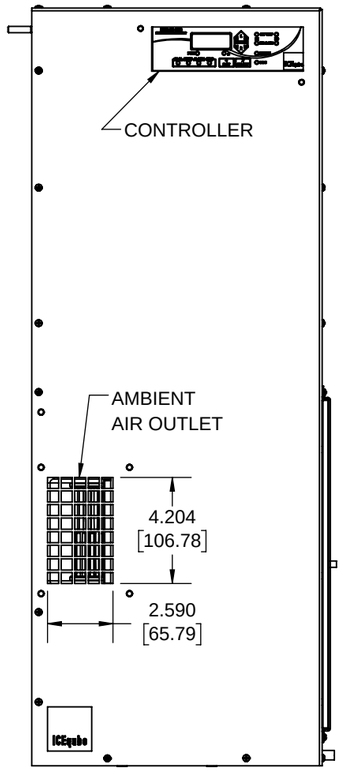

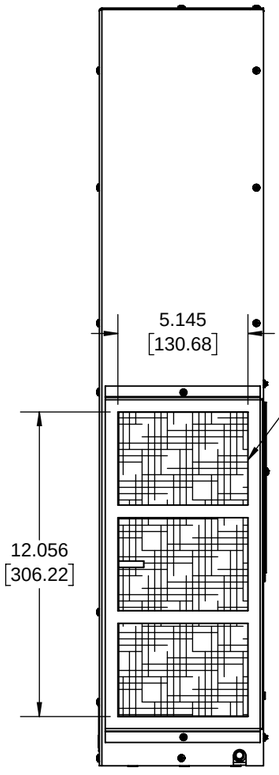

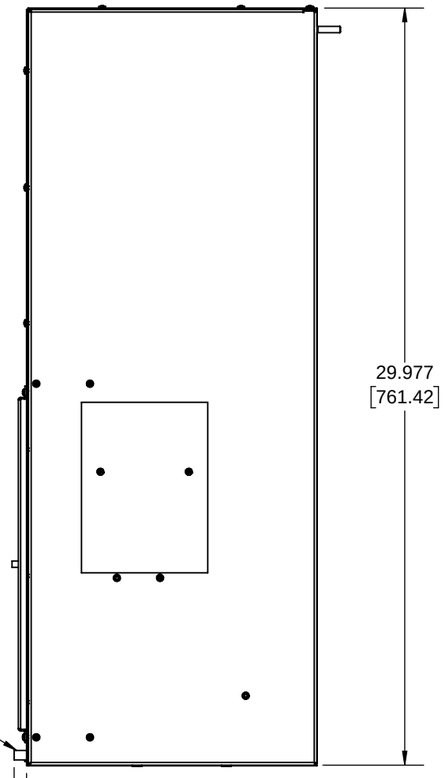

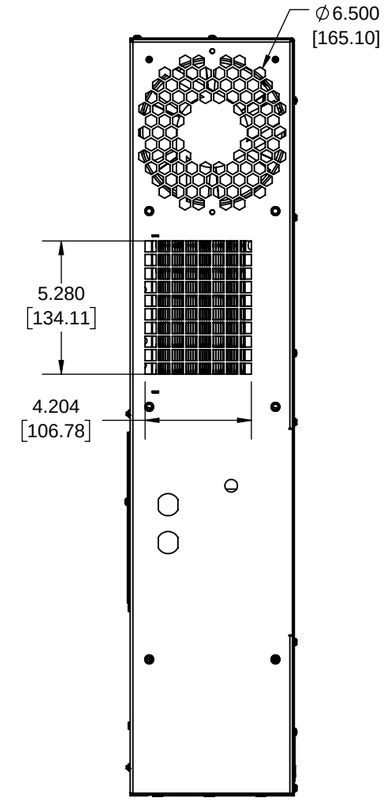

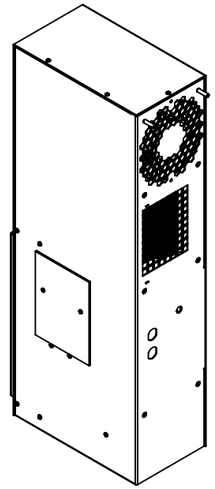

IQ1800VXS
COOLING CAPACITY: 1800 BTUH (528W) @131˚F (55˚C)
MAXIMUM AMPS: 4.0 (480W) @120V/60HZ
MAXIMUM AMPS: 2.0 (460W) @230V/60HZ
MAXIMUM OPERATING TEMP: 131˚F (55˚C)
MINIMUM OPERATING TEMP: -40˚F (-40˚C)
DIMENSIONS: 30.00" (762MM) H X 6.50" (165MM) W X 11.50" (292MM) D
WEIGHT: 45 LBS (20.5KG)

REV	REVISION	CHG	DATE	APP	DATE	CN #
D	REVISED CUTOUT	SRZ	4/15/2020	NAT	4/29/2020	ECN-1429
C	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	3/26/2018			1351
B	ADDED WATTAGE INFO	RCC	1/2/2018			
A	REDRAWN IN SW	RCC	4/7/2017			

ITEM NUMBER: *N/A*
MATERIAL: *N/A*
EST WT: lbs
USED ON: *IQ1800VXS*
DRAWN BY: *RCC*
DATE: *4/7/2017*
SCALE: *1:6*

UNLESS OTHERWISE SPECIFIED TOLERANCES
.X ±.060
.XX ±.030
.XXX ±.015
FRACTIONAL ±1/16
ANGULAR ±1/2°
SURFACE FINSH 63
DO NOT SCALE DRAWING
DIMENSIONS ARE INCHES

ICEqube
ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
DESCRIPTION
IQ1800VXS SPEC DRAWING
DRAWING NUMBER
IQ351405
REV
D

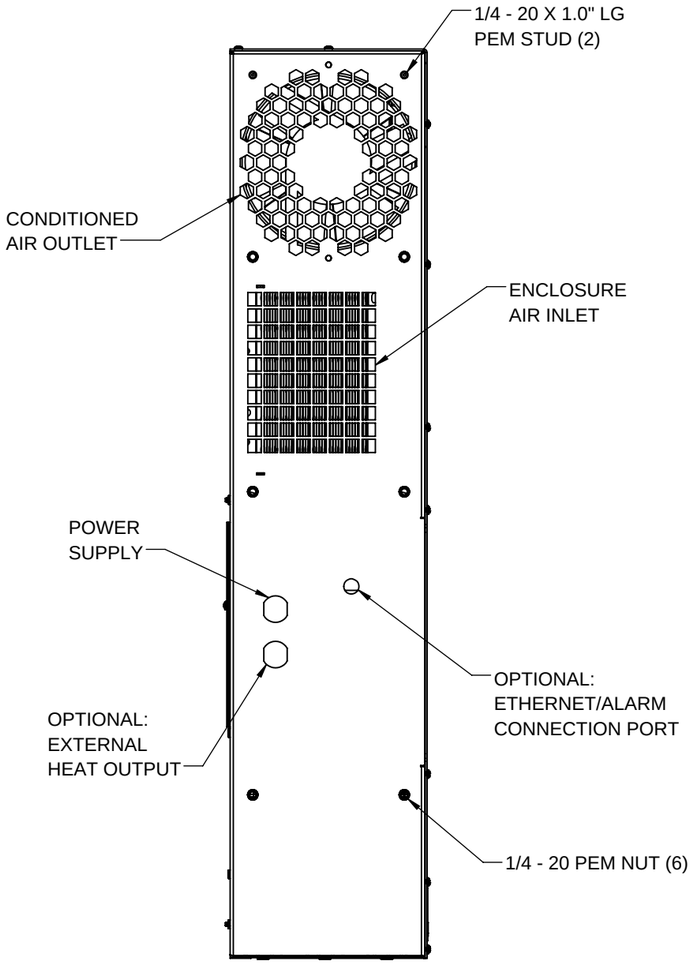

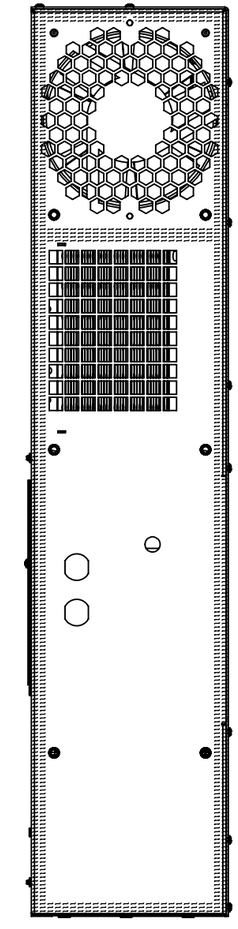

IMPORTANT
GASKET MUST BE
APPLIED AS SHOWN
FOR PROPER OPERATION
AND TO MAINTAIN
NEMA INTEGRITY.

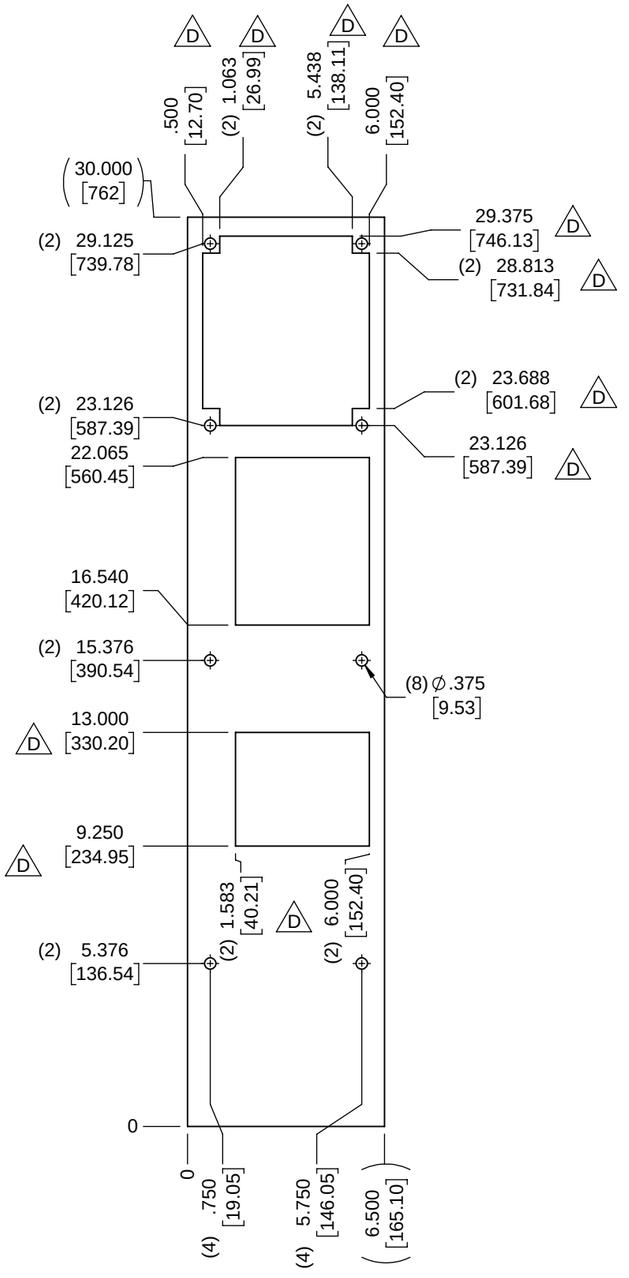

EVAP. OUTLET å 190 CFM
COND. OUTLET å 158 CFM
SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 60 dBA
SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 61 dBA
CONDENSER INLET MIN. CLEARANCE 2.08"

ITEM NUMBER: N/A	USED ON: IQ1800VXS	UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ±.060, .XX ±.030, .XXX ±.015, FRACTIONAL ±1/4, ANGULAR ±1/2°, SURFACE FINSH 63, DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
MATERIAL: N/A			DESCRIPTION: IQ1800VXS SPEC DRAWING
EST WT: lbs			DRAWING NUMBER: IQ351405 — REV: D
DRAWN BY: RCC	DATE: 4/7/2017	SCALE: 1:5	