
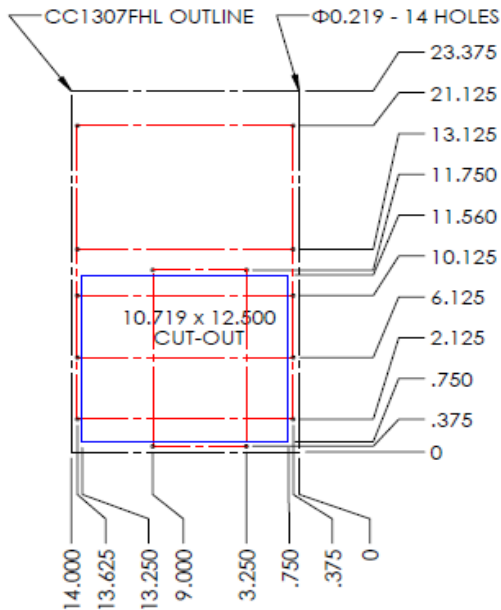


CC1307FHL-WL-IP66, xxx COMPACT CABINET COOLER AIR-TO-AIR FLUSH-MOUNT MODEL HAZARDOUS LOCATION CLASS I, ZONE 2 (ATEX/IECEx)

Model	Weight	Rating @ 20°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size	Dimensions-Inches (H x W x D)
CC1307FHL	41 lbs	5,100	0.6	2 x 6"	23-3/8 x 14 x 7-7/8

Efficiency: 75.0 Watts / °C ΔT based on average internal cabinet temperature.


ATEX/IECEx Certificate Reference: **DEMKO 15 ATEX 1403. IECEx UL 15.0081 X**

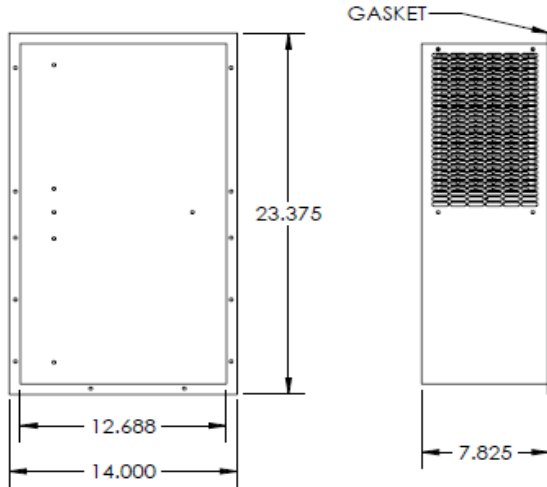

Outside View



Inside View

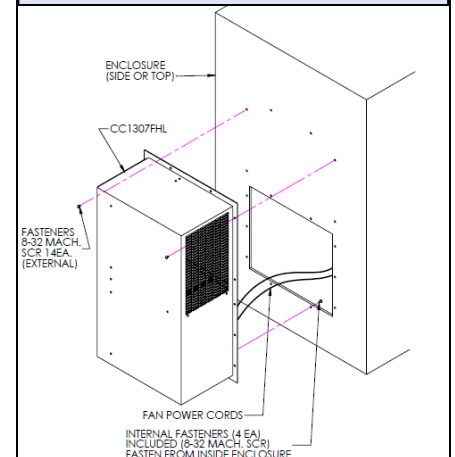

SPECIFICATIONS

- ATEX/IECEx certified for hazardous locations Class I, Zone 2 environments.
- CC1307FHL Rated cooling: 1,500 Watts at 20°C ΔT (75.0W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
- Designed for surface mounting on outside of cabinet.
- Housing is Stainless Steel (TYPE 316 14 GAUGE).
- Equipped with mounting gasket to maintain air tight seal.
- Available with AC (115 & 230V) and DC (12, 24 & 48V).
- Unit may be mounted vertically (as shown) or horizontally.
- Optional: inlet air-filter kit available upon request.
- ATEX/IECEx Standards: 60079-0, 6th Ed. + Corr. 1:2012 + Corr. 2:2013, IEC 60079-15, 4th Ed., CENELEC EN 60079-0:2012 + A11:2013 and CENELEC EN 60079-15:2010
- 10. For design, quote, and sizing assistance: call (888) 754-6329.**

Subject to change without notice.



Proudly made
in the USA



FM 554949



Pelmar Engineering Ltd.

Tel. (888) 754-6329
sales@pelmareng.com
www.pelmareng.com

CC1307FHL-WL-IP66, xxx

UL-PBD-8.2.1-200004-D