
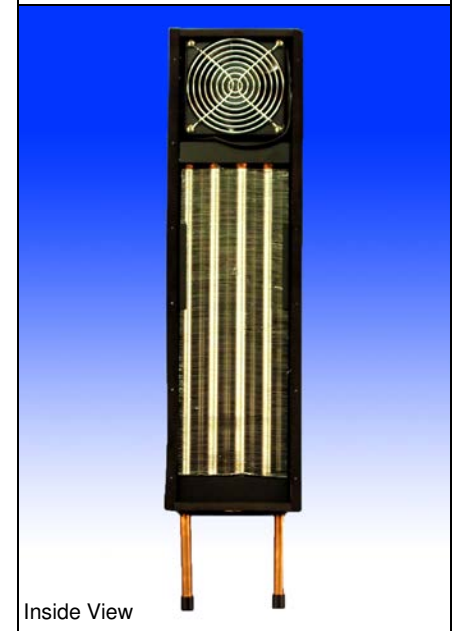
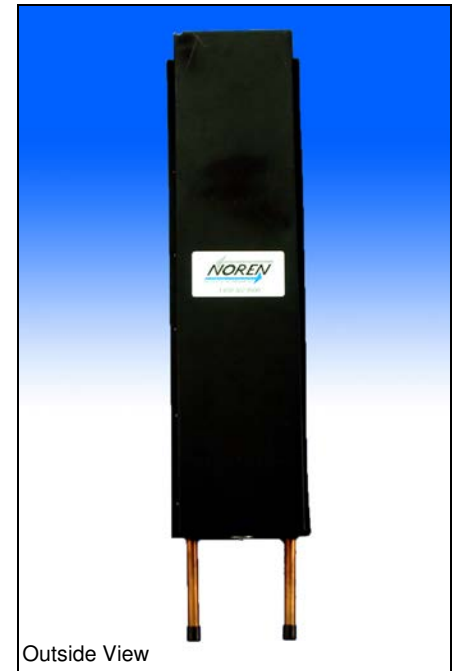


CC2060 TYPE 12 COMPACT CABINET COOLER AIR-TO-WATER FLUSH-MOUNT MODEL

Model	Weight	Rating @ 40°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size	Dimensions-Inches (H x W x D)
CC2060	9 lbs	3,350	0.2	1 x 4"	22-1/2 x 6-1/4 x 4

Efficiency: 24.5 Watts / °C ΔT based on average internal cabinet temperature.

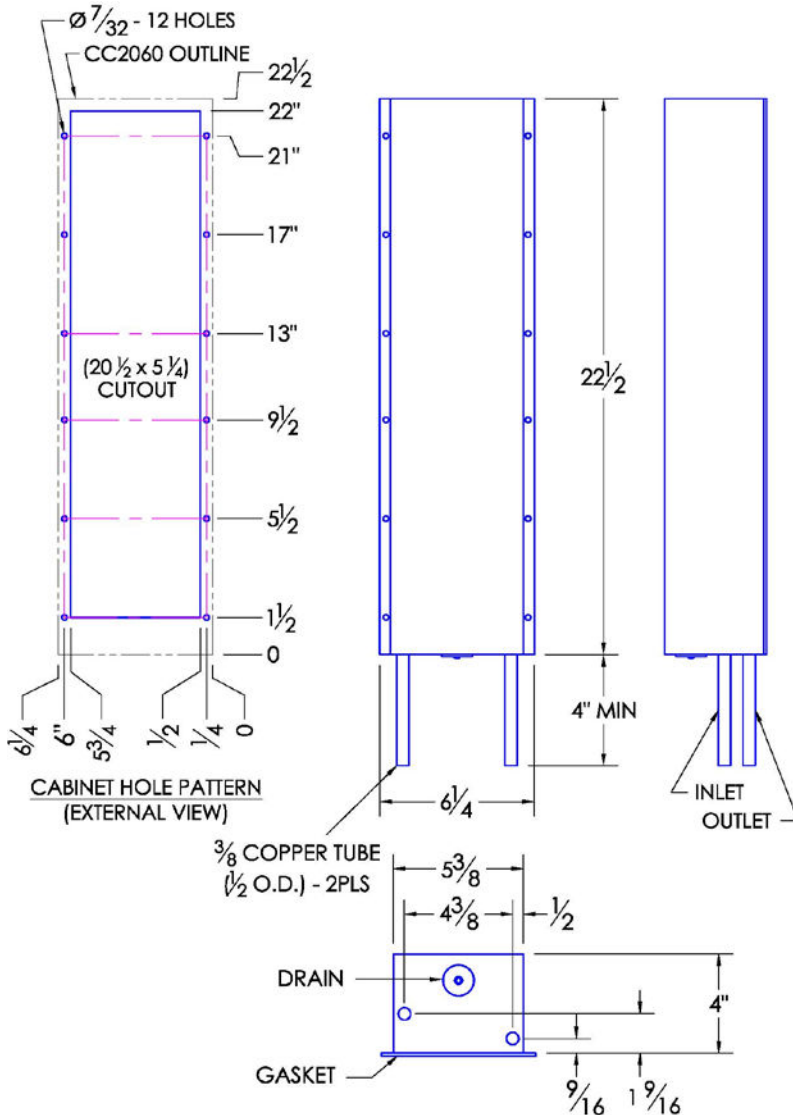

SPECIFICATIONS

1. UL Listed for TYPE 12 environments.
2. CC2060 Rated cooling: 980 Watts mounted to an uninsulated 24" x 24" x 16" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature.
3. Designed for surface mounting on the outside of cabinet.
4. Housing is aluminum (color is black).
5. External water inlet and outlet connections.
6. Equipped with mounting gasket to maintain air tight seal.
7. Available with AC (115 & 230V) and DC (12, 24, & 48V) fans. DC version includes junction box, consult website.
8. Vertical mounting only.
9. Coolant water pressure: Pressure tested to 100 psi. Safe working pressure is 60 psi.
10. Recommended coolant flow rate (gallons per minute): 1 GPM
11. For design, quote, and sizing assistance: call (888) 754-6329, (416) 288-1736



Pelmar Engineering Ltd.

Tel. (888) 754-6329
sales@pelmareng.com
www.pelmareng.com

CC2060 TYPE 12

CCS-PBD-8.2.1-883342-C