


# CC3060 TYPE 12 COMPACT CABINET COOLER AIR-TO-WATER FLUSH-MOUNT MODEL

Model	Weight	Rating @ 40°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size	Dimensions-Inches (H x W x D)
CC3060	13 lbs	9,300	0.3	1 x 6"	30 x 8-3/4 x 4

Efficiency: 68.8 Watts / °C ΔT based on average internal cabinet temperature.

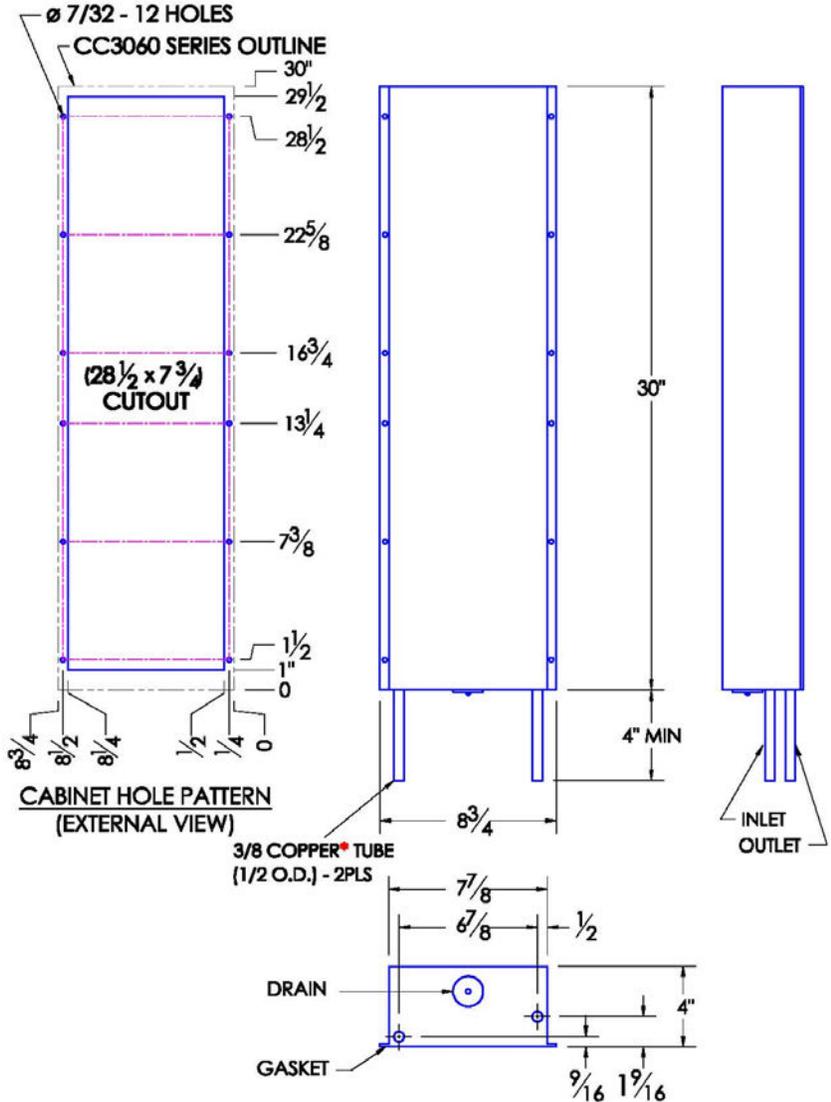

- ### SPECIFICATIONS
- UL Listed for TYPE 12 environments.
  - CC3060 Rated cooling: 2,725 Watts mounted to an uninsulated 72" x 36" x 24" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature.
  - Designed for surface mounting on the outside of cabinet.
  - Housing is aluminum (color is black).
  - External water inlet and outlet connections.
  - Equipped with mounting gasket to maintain air tight seal.
  - Available with AC (115 & 230V) and DC (12, 24, & 48V) fans. DC version includes junction box, consult website.
  - Vertical mounting only.
  - Coolant water pressure: Pressure tested to 100 psi. Safe working pressure is 60 psi.
  - Recommended coolant flow rate (gallons per minute): 1 GPM
  - For design, quote, and sizing assistance: call (888) 754-6329, (416) 288-1736



**THE THERMAL SOLUTIONS**  
**NOREN**  
Products Incorporated

**Pelmar Engineering Ltd.**  
Tel. (888) 754-6329  
sales@pelmareng.com  
www.pelmareng.com

**CC3060 TYPE 12**  
CCS-PBD-8.2.1-883343-C

Subject to change without notice.