
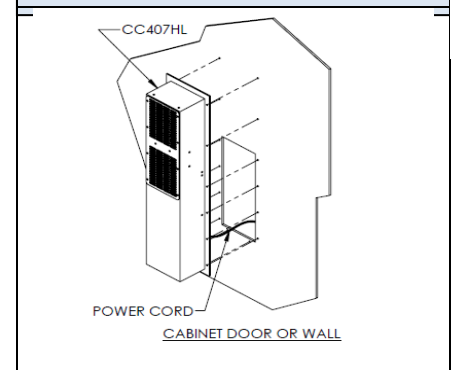


## CC407FHL-WL-IP66, xxx COMPACT CABINET COOLER AIR-TO-AIR FLUSH-MOUNT MODEL HAZARDOUS LOCATION CLASS 1, ZONE 2 (ATEX/IECEX)

Model	Weight	Rating @ 20°C ΔT BTU / hr	Amps Current Draw at 115 volts AC	Fan Size 2 x 4"	Dimensions-Inches (H x W x D)
CC407FHL	17 lbs	1,400	0.4	2 x 4"	27-1/2 x 6-7/8 x 4-3/16

Efficiency: 20.4 Watts / °C ΔT based on average internal cabinet temperature.  
ATEX/IECEX Certificate Reference: **DEMKO 15 ATEX 1403. IECEX UL 15.0081 X**

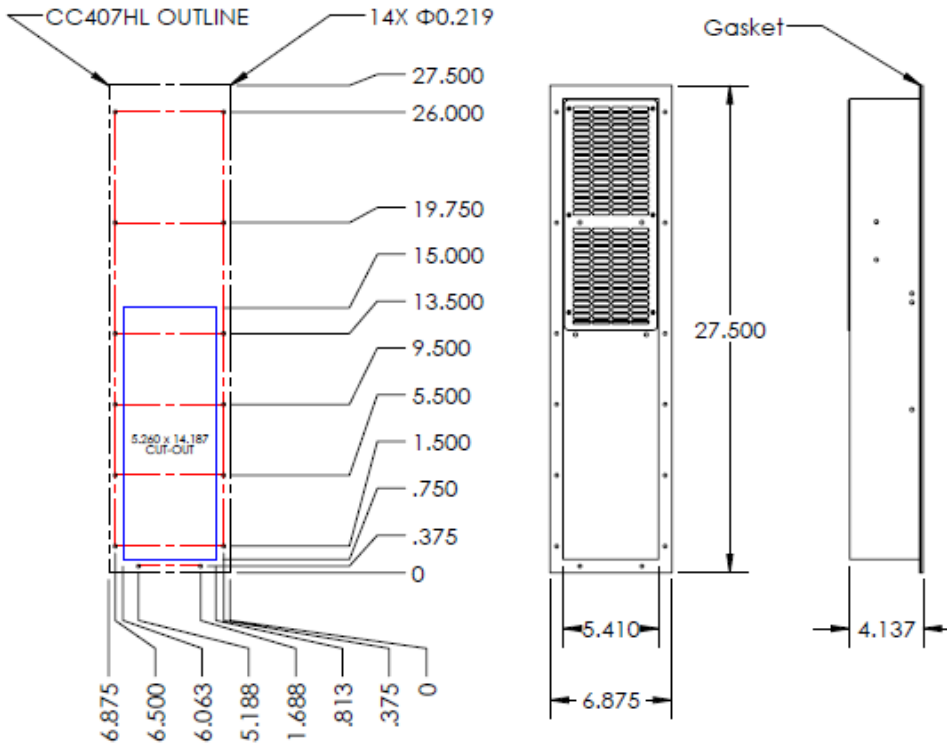

### SPECIFICATIONS

- ATEX/IECEX certified for hazardous locations Class I, Zone 2 environments.
- CC407F Rated cooling: 408 Watts at 20°C ΔT (20.4W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
- Designed for surface mounting on outside of cabinet.
- Housing is Stainless Steel (TYPE 316 14 GAUGE).
- Equipped with mounting gasket to maintain air tight seal.
- Available with AC (115 & 230V) and DC (12, 24 & 48V)
- Unit may be mounted vertically (as shown) or horizontally.
- Optional: inlet air-filter kit available upon request.
- ATEX/IECEX Standards: 60079-0, 6th Ed. + Corr. 1:2012 + Corr. 2:2013, IEC 60079-15, 4th Ed., CENELEC EN 60079-0:2012 + A11:2013 and CENELEC EN 60079-15:2010
- 10. For design, quote, and sizing assistance: call (888) 754-6329.**



NOREN ESTABLISHED 1982

**Pelmar Engineering Ltd.**

Tel. (888) 754-6329  
sales@pelmareng.com  
www.pelmareng.com

**CC407FHL-WL-IP66, xxx**

UL-PBD-8.2.1-200001-D