

CC500 TYPE 12 COMPACT CABINET COOLER AIR-TO-AIR DROP-IN MODEL


Rating @ 20°C ∆T Amps

Model Weight CC500 11 lbs

BTU / hr 2,400 Current Draw at 115 volts AC

Fan <u>Size</u> 2 x 6" Dimensions-Inches (H x W x D) 15 x 7-3/4 x 7

Efficiency: 35.2 Watts / °C ΔT based on average internal cabinet temperature.

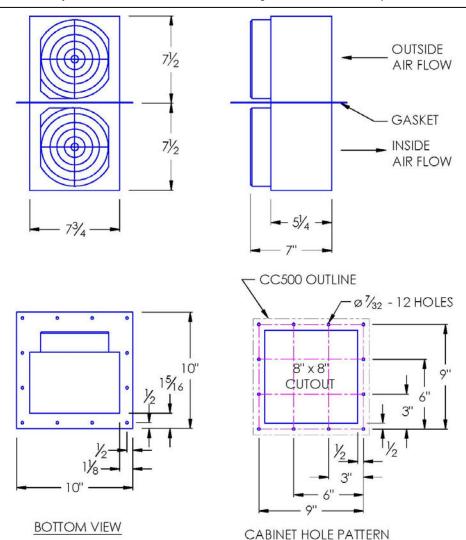

Front View Back View Filter (Optional)

SPECIFICATIONS

(EXTERNAL VIEW)

- 1. UL Listed for TYPE 12 environments.
- 2. CC500 Rated cooling: 704 Watts at 20°C ΔT (35.2 W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
- 3. Extends 7-1/2" into cabinet.
- 4. Housing is aluminum (color is black). Stainless steel is available.
- 5. Equipped with mounting gasket to maintain air tight seal.
- 6. Internal 6-ft. power cord with 3-prong plug is standard for AC powered units.
- 7. Available with VAC (115 & 230) and VDC (12, 24, & 48) fans. DC powered units include junction box, consult website.
- 8. Unit may be mounted vertically (as shown) or horizontally.
- 9. Optional: inlet air-filter kit available upon request.
- 10. For design, quote, and sizing assistance: call (888) 754-6329, (416) 288-1736









Pelmar Engineering Ltd.
Tel. (888) 754-6329
sales@pelmareng.com

www.pelmareng.com
CC500 TYPE 12

CCS-PBD-8.2.1-883358-C