

Weight

14 lbs

Model

CC600F


CC600F TYPE 12 COMPACT CABINET COOLER AIR-TO-AIR FLUSH-MOUNT MODEL

Rating @ 20°C ∆T Amps

BTU / hr 3,300 Current Draw at 115 volts AC 0.6 Fan <u>Size</u> 2 x 6"

Dimensions-Inches (H x W x D) 30 x 8-3/4 x 4

Efficiency: 49.4 Watts / °C ΔT based on average internal cabinet temperature.

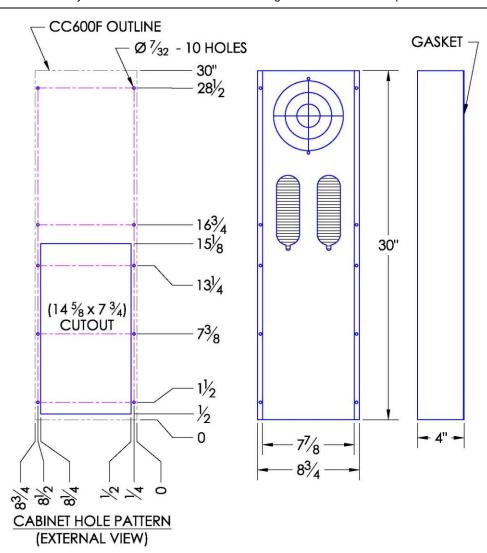









- 1. UL Listed for TYPE 12 environments.
- 2. CC600F Rated cooling: 988 Watts at 20°C ΔT (49.4W/°C, mounted to an uninsulated 72" X 36" X 24" Cabinet)
- 3. Designed for surface mounting on outside of cabinet.
- 4. Housing is aluminum (color is black). Stainless steel is available.
- 5. Equipped with mounting gasket to maintain air tight seal.
- 6. Available with AC (115 & 230V) and DC (12, 24, & 48) fans. DC version includes junction box, consult website.
- 7. Vertical and horizontal mounting ok.
- 8. Optional: inlet air-filter kit available upon request.
- 9. For design, quote, and sizing assistance: call (888) 754-6329, (416) 288-1736









Pelmar Engineering Ltd.

Tel. (888) 754-6329 sales@pelmareng.com www.pelmareng.com

CC600F TYPE 12

CCS-PBD-8.2.1-883349-C