

MODEL : **IQ10000 ECO**
 NOMINAL COOLING CAPACITY :
 9935 BTUH (2912W) @ 131-131°F (55°-55°C)
 9808 BTUH (2874W) @ 95-95°F (35°-35°C)
 MAX COOLING AMPS 17.8 (2136W) @ 120V/60Hz
 MAX COOLING AMPS 9.83 (2260W) @ 230V/60Hz
 MAX COOLING AMPS 9.37 (2061W) @ 220V/50Hz
HEAT COMING SOON
 MAX OPERATION TEMPERATURE : 131°F (55°C)
 DIMENSIONS : 38.594"(980MM) H x 11.240"(285MM) W x 14.417"(366MM) D
 DIMENSIONS : 38.594"(980MM) H x 11.715"(298MM) W x 14.417"(366MM) D; W/ FILTER COVER
 WEIGHT : 132 LBS. (59.9 KG)
 REFRIGERANT CHARGE : R407C 30 OZ (850G) 120V/230V

ITEM NUMBER	N/A	USED ON	IQ10000 ECO
MATERIAL	N/A		
EST WT:	lbs		
DRAWN BY	JWS	DATE	4/15/2021
SCALE	1:10		
REV		APP	
		DATE	
		CN #	


UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH	63
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.
 THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.

DESCRIPTION
IQ10000 ECO SPEC DRAWING

DRAWING NUMBER
IQ352700

REV
A

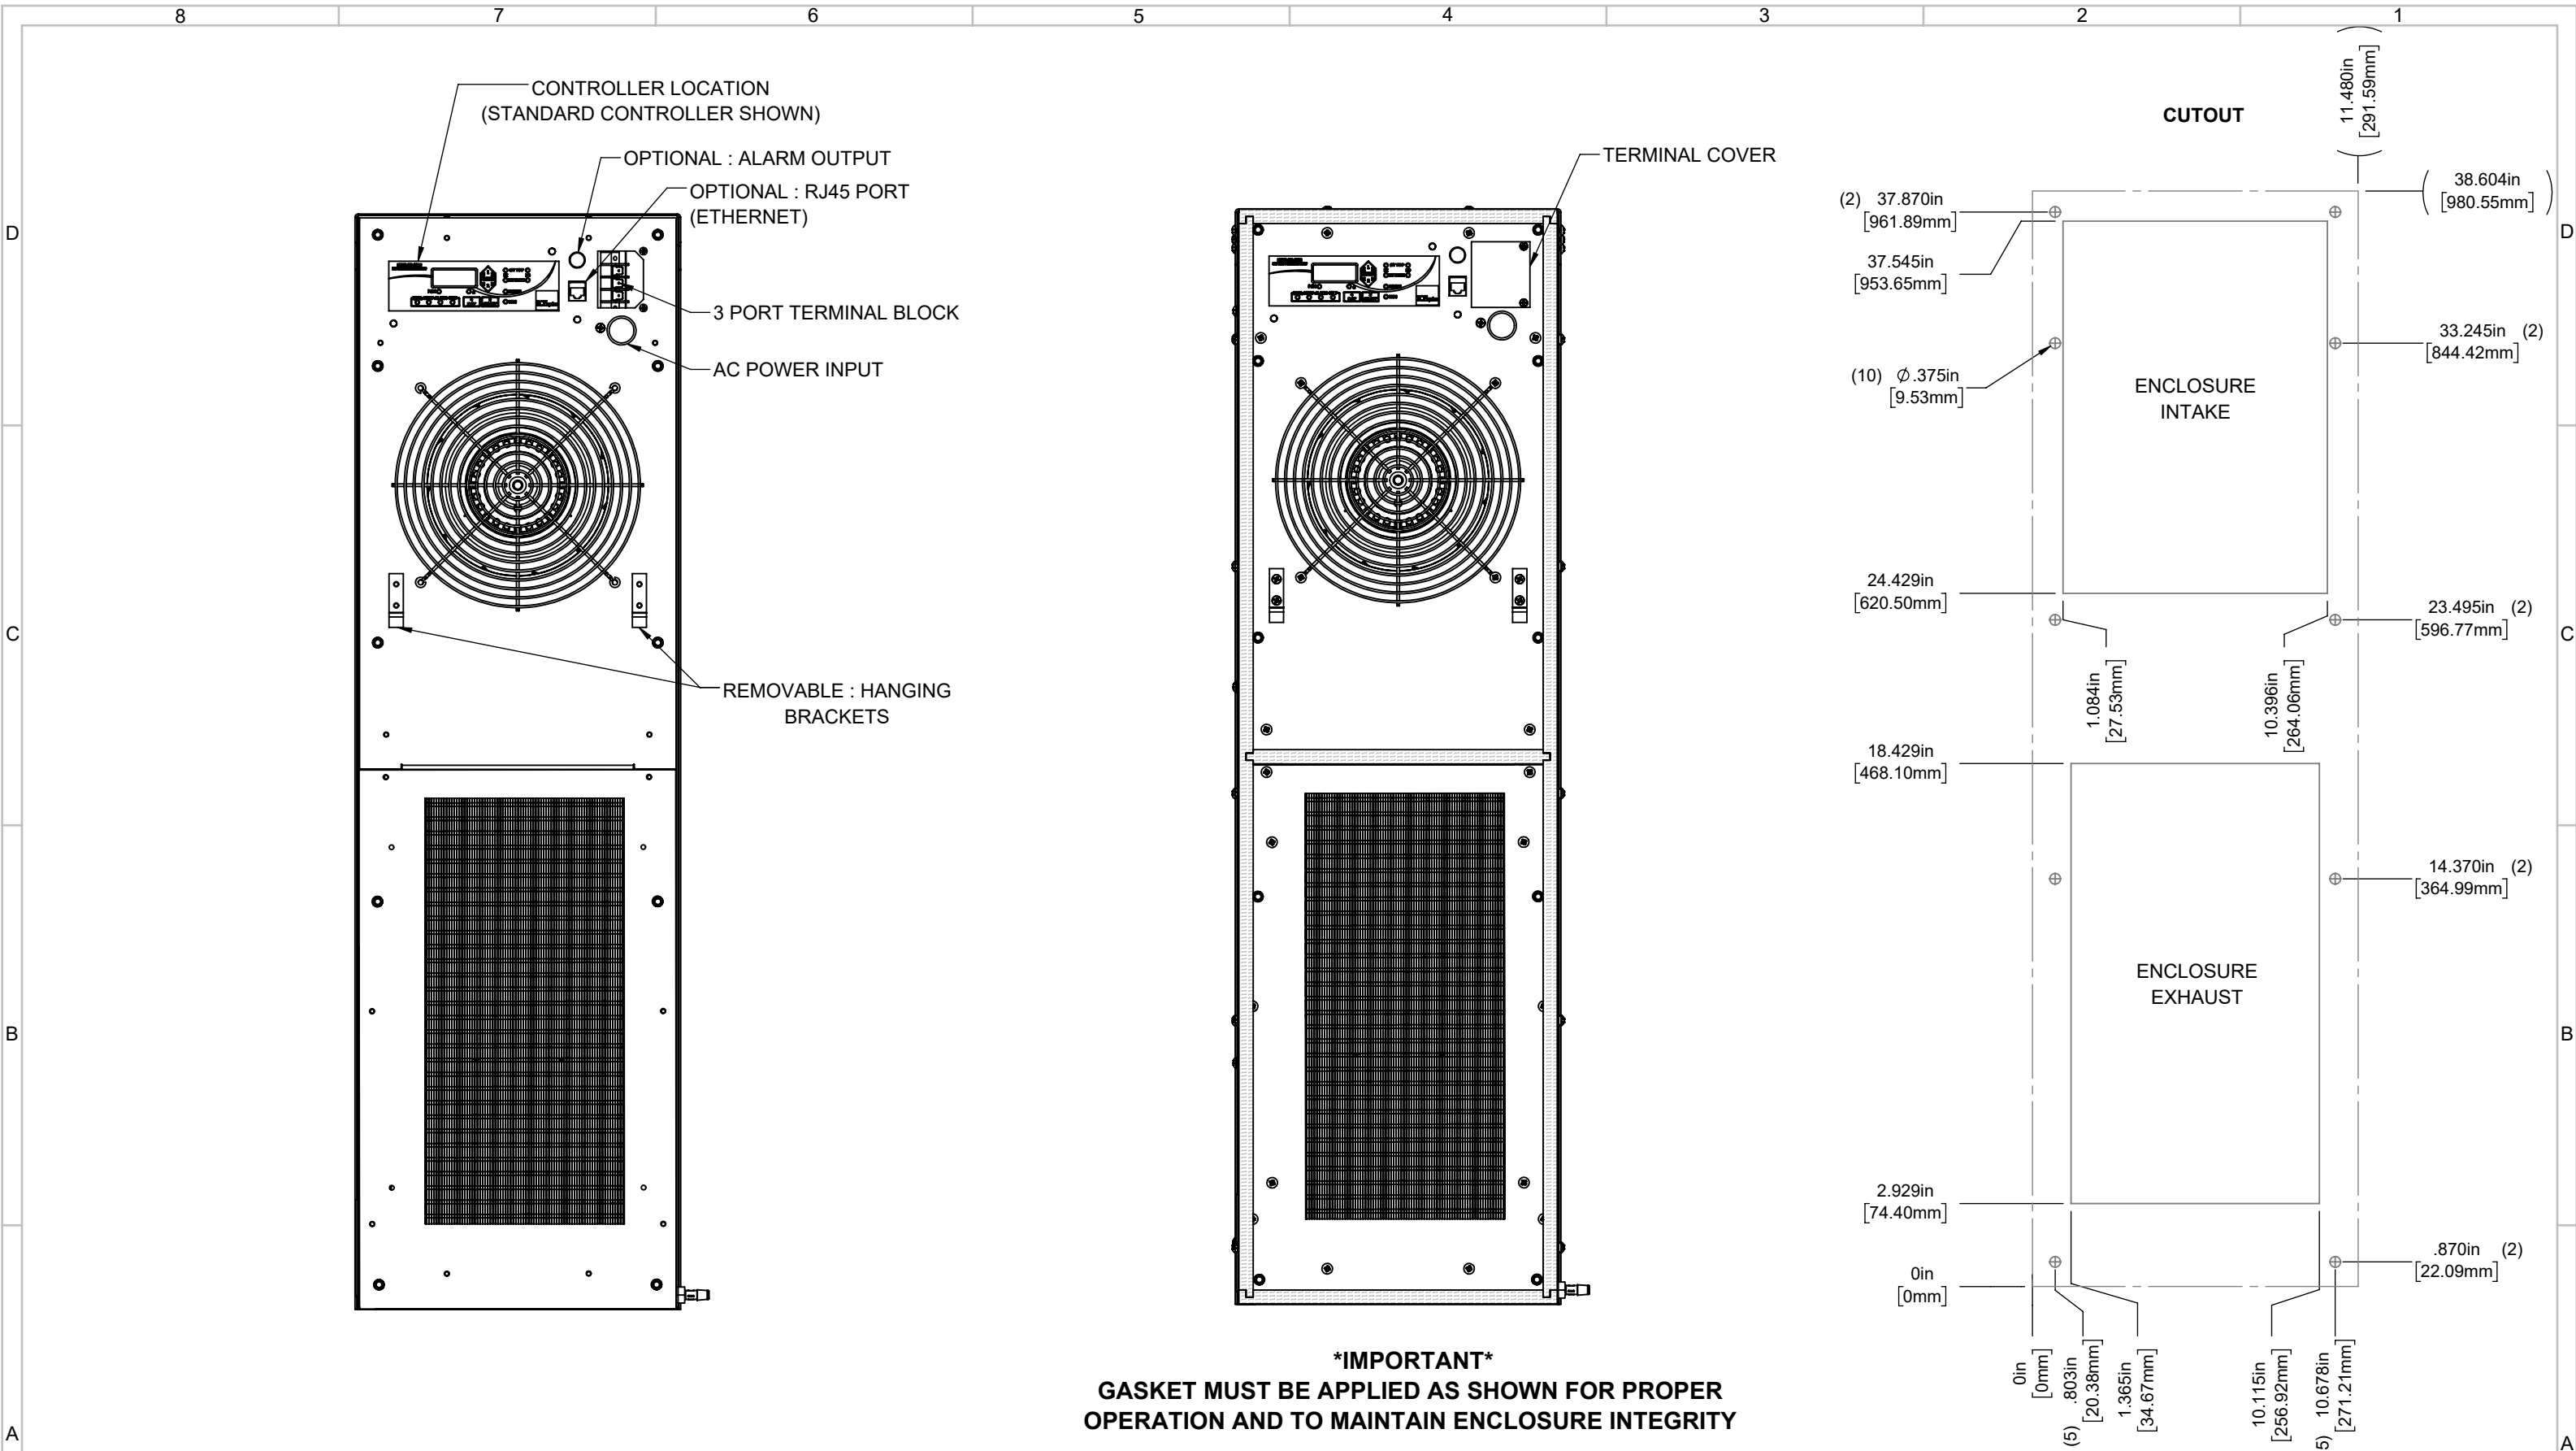

EVAP. OUTLET ≈ 525 CFM
 COND. OUTLET ≈ 760 CFM
 SOUND LEVEL @5FT FROM UNIT @ HT. OF 3 FT = 69dBA
 SOUND LEVEL @2FT FROM UNIT @ HT. OF 5 FT = 71dBA
 CONDENSER INLET MIN CLEARANCE 2.54"

ITEM NUMBER <i>N/A</i>	USED ON <i>IQ8000 ECO</i> <i>IQ10000 ECO</i> <i>IQ12000 ECO</i>	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°	 <small>THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</small>
MATERIAL <i>N/A</i>		<small>DO NOT SCALE DRAWING DIMENSIONS ARE INCHES</small>	
EST WT: lbs	DATE <i>4/15/2021</i>	SCALE <i>1:12</i>	DESCRIPTION <i>IQ10000 ECO SPEC DRAWING</i>
DRAWN BY <i>JWS</i>			DRAWING NUMBER <i>IQ352700</i>
			REV <i>A</i>