



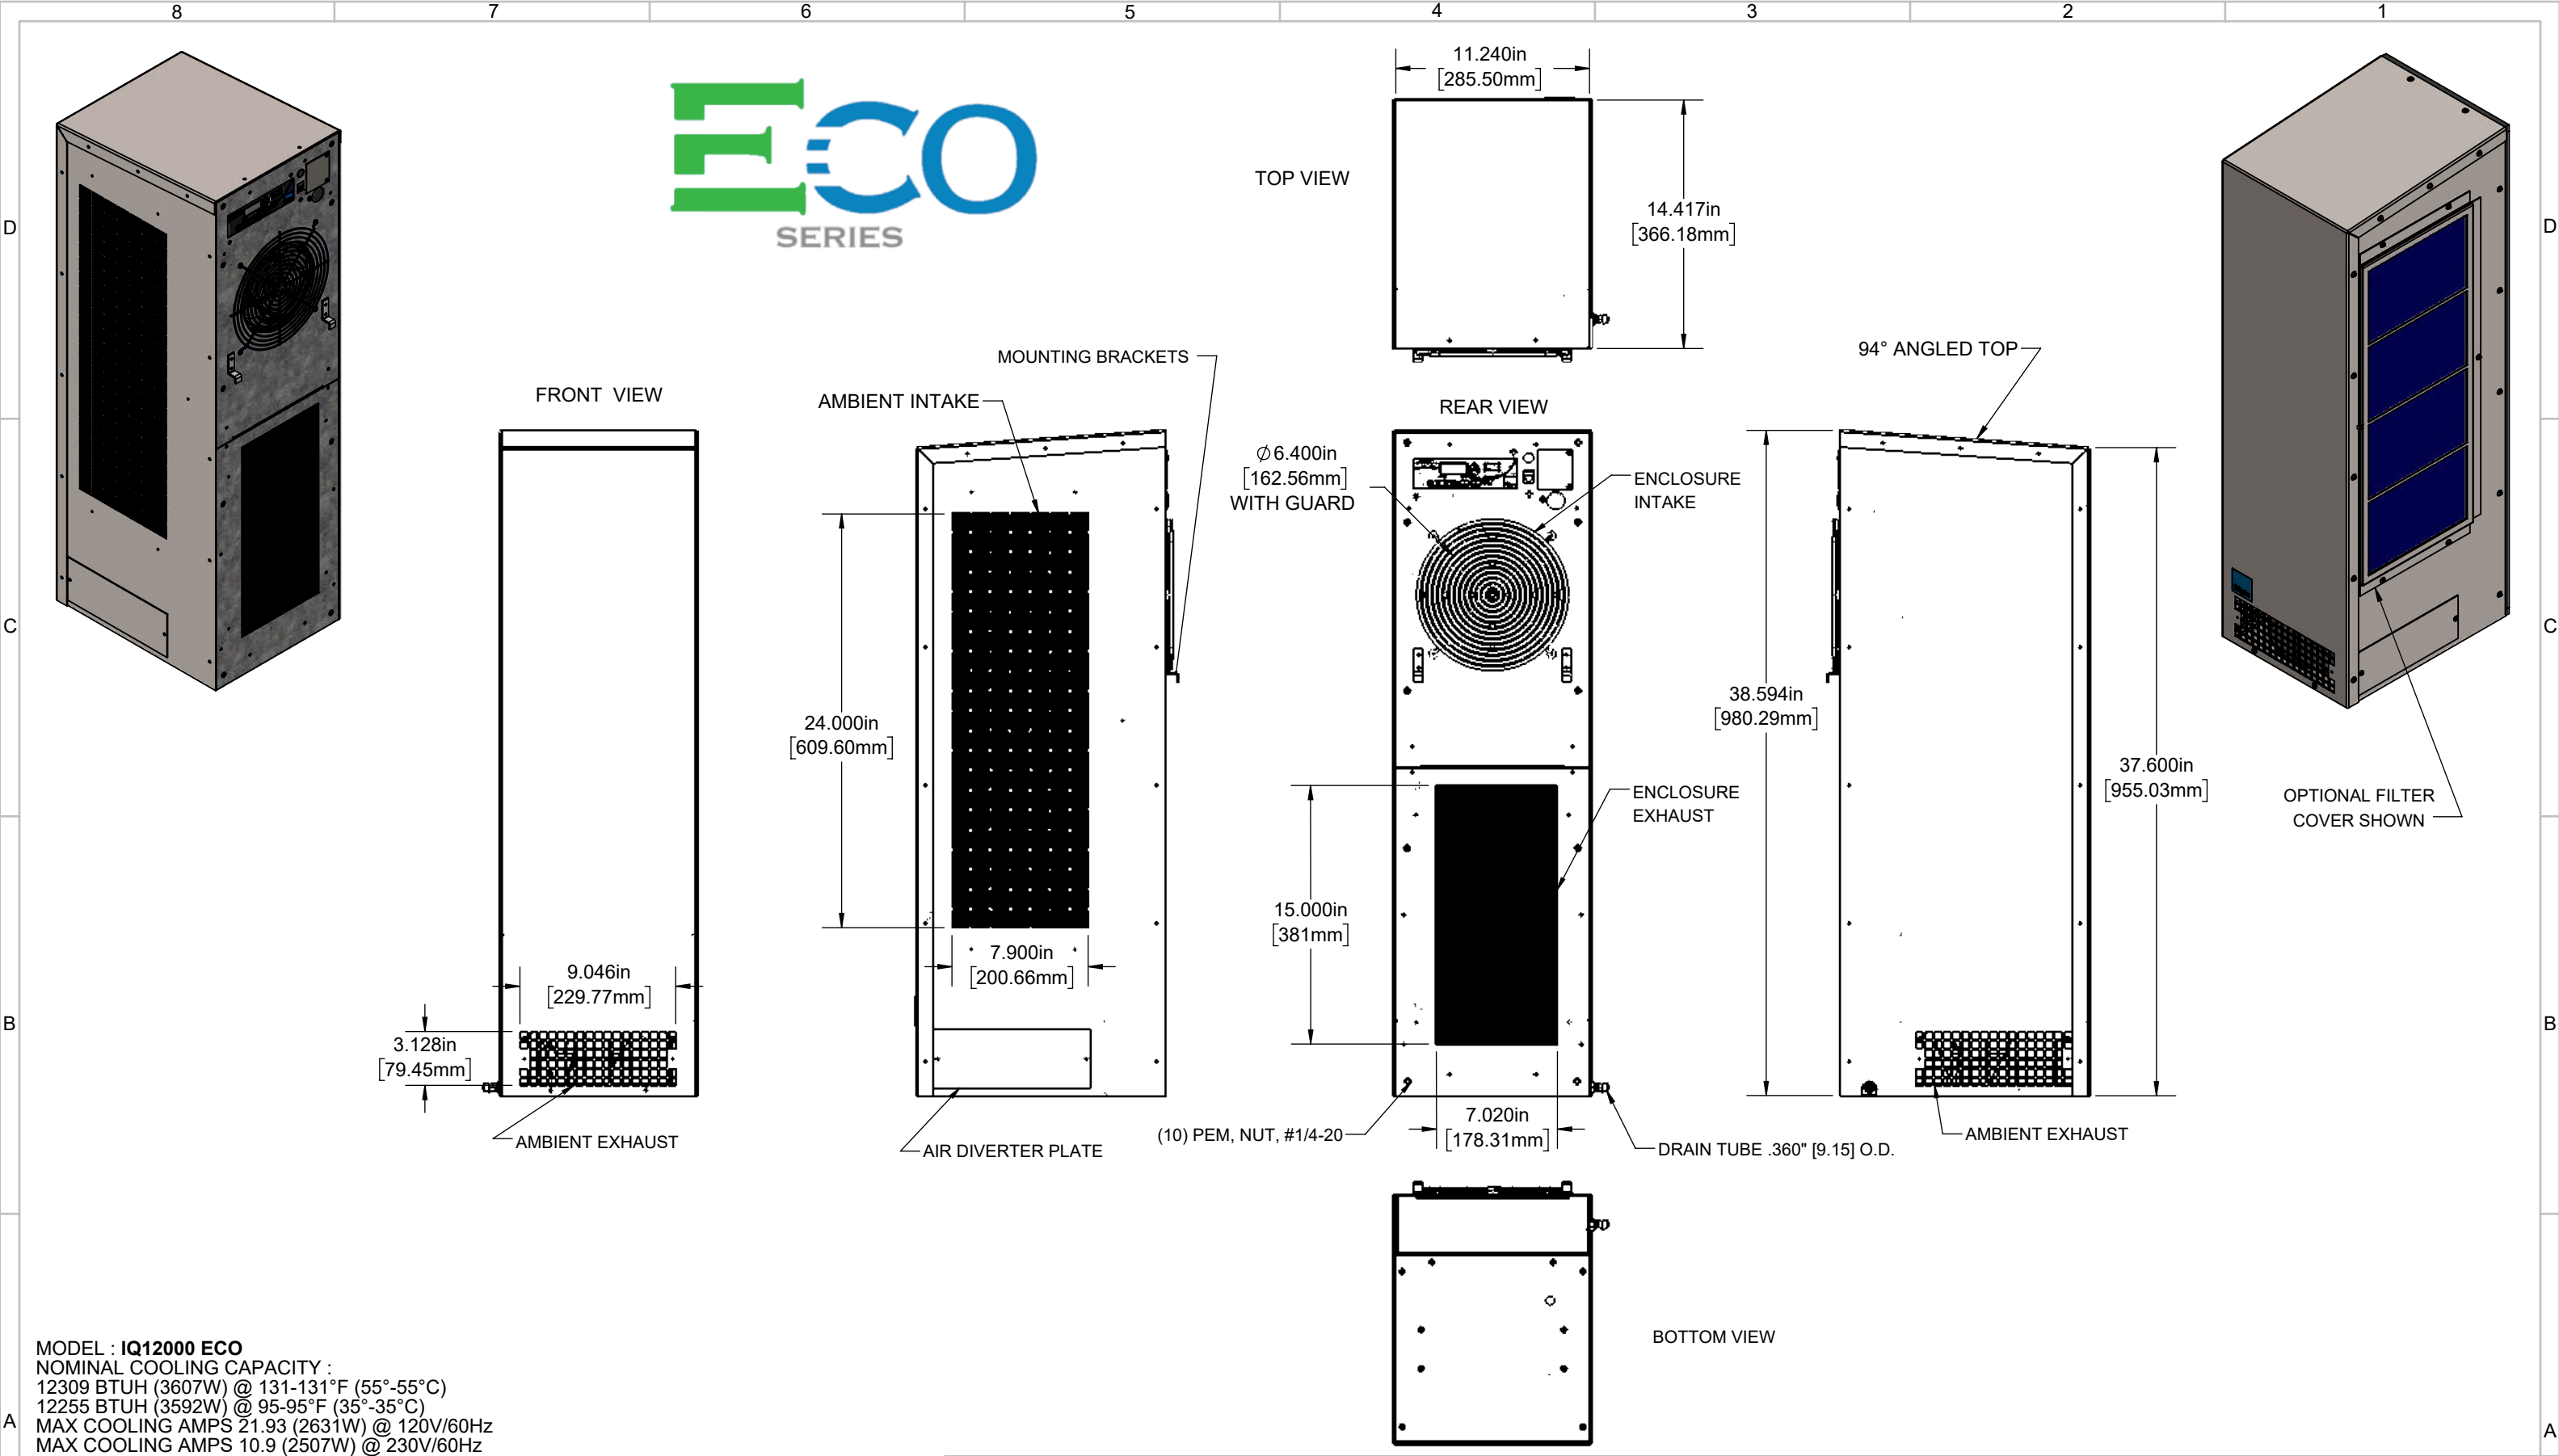

MODEL : **IQ12000 ECO**
NOMINAL COOLING CAPACITY :
12309 BTUH (3607W) @ 131-131°F (55°-55°C)
12255 BTUH (3592W) @ 95-95°F (35°-35°C)
MAX COOLING AMPS 21.93 (2631W) @ 120V/60Hz
MAX COOLING AMPS 10.9 (2507W) @ 230V/60Hz
MAX COOLING AMPS 10.8 (2376W) @ 220V/50Hz
HEAT COMING SOON
MAX OPERATION TEMPERATURE : 131°F (55°C)
DIMENSIONS : 38.594"(980MM) H x 11.240"(285MM) W x 14.417"(366MM) D
DIMENSIONS : 38.594"(980MM) H x 11.715"(298MM) W x 14.417"(366MM) D; W/ FILTER COVER
WEIGHT : 132 LBS. (59.9 KG)
REFRIGERANT CHARGE : R407C 44 OZ (1247G) 120V/230V

ITEM NUMBER N/A							USED ON IQ12000 ECO		UNLESS OTHERWISE SPECIFIED TOLERANCES .X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/16 ANGULAR ±1/2° SURFACE FINISH 63		ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.	
MATERIAL N/A							EST WT: lbs		DO NOT SCALE DRAWING DIMENSIONS ARE INCHES		DESCRIPTION IQ12000 ECO SPEC DRAWING	
DRAWN BY JWS							DATE 4/15/2021		SCALE 1:10		DRAWING NUMBER IQ352701	
REV							CHG		DATE		APP	
INITIAL DRAFT							JWS		4/15/2021			
REVISION							CHG		DATE		APP	
											CN #	

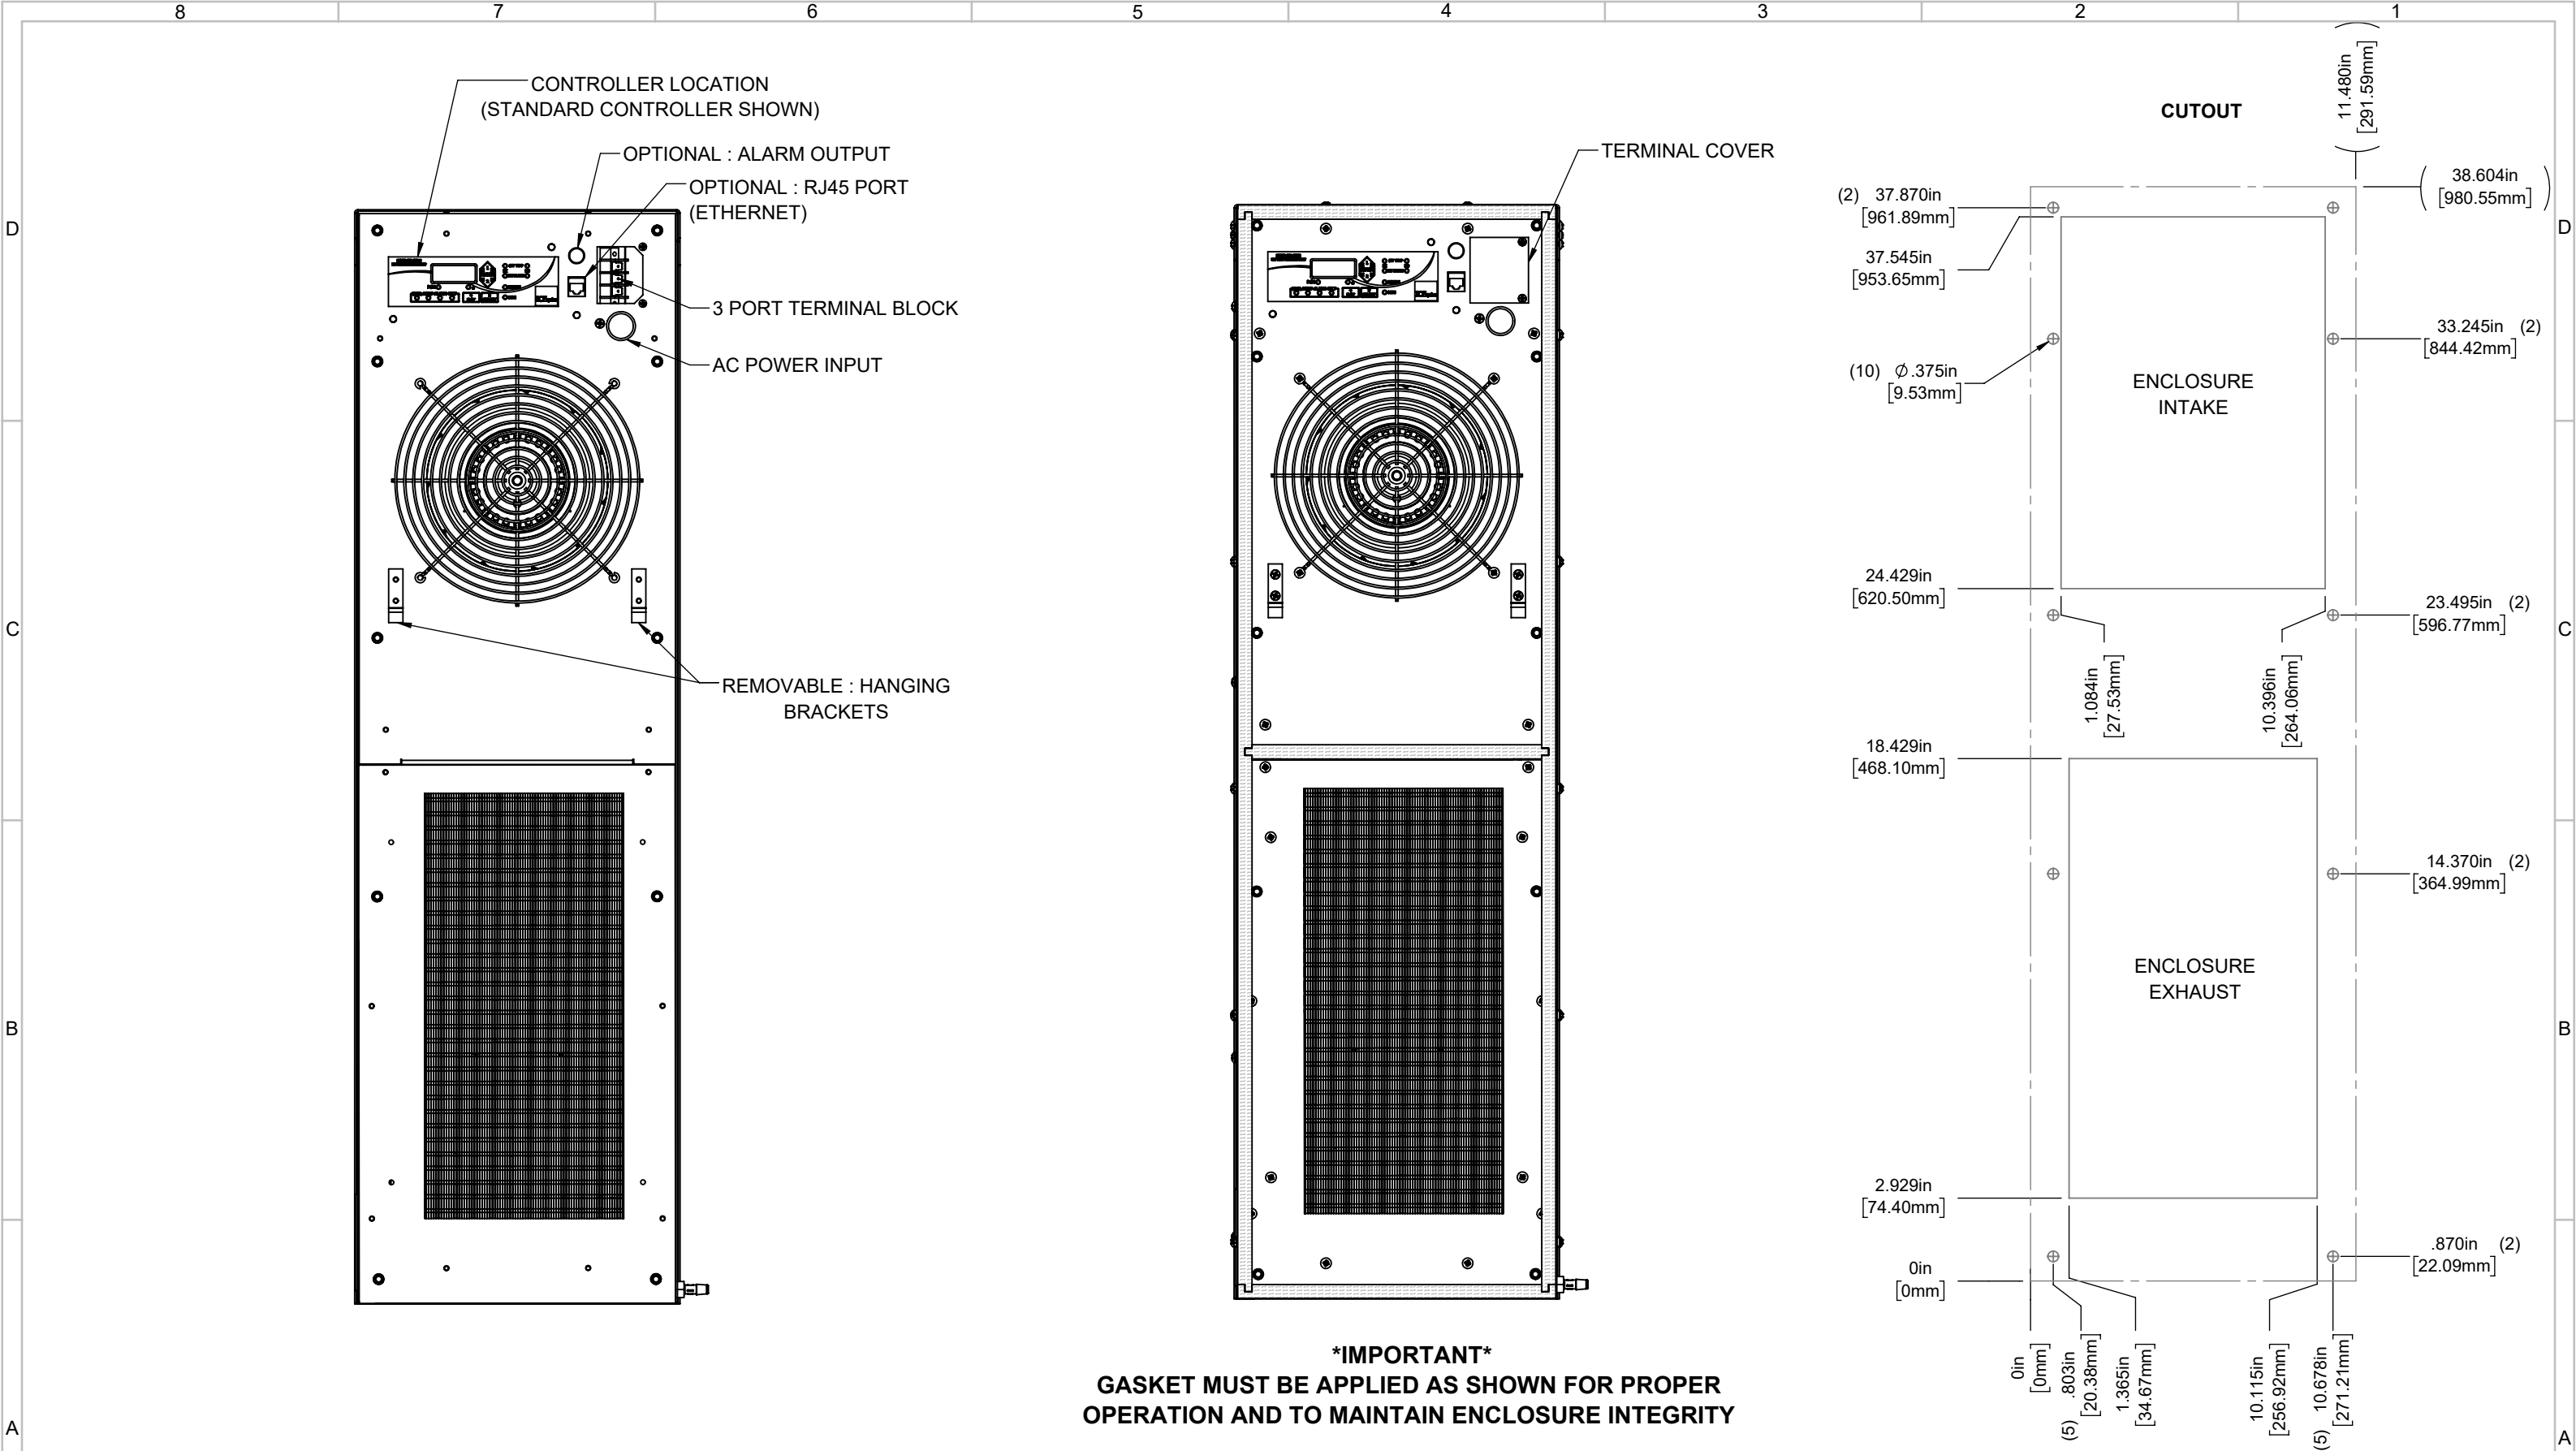

IMPORTANT
**GASKET MUST BE APPLIED AS SHOWN FOR PROPER
OPERATION AND TO MAINTAIN ENCLOSURE INTEGRITY**

EVAP. OUTLET ≈ 525 CFM
COND. OUTLET ≈ 760 CFM
SOUND LEVEL @5FT FROM UNIT @ HT. OF 3 FT = 69dBA
SOUND LEVEL @2FT FROM UNIT @ HT. OF 5 FT = 71dBA
CONDENSER INLET MIN CLEARANCE 2.54"

ITEM NUMBER <i>N/A</i>		USED ON <i>IQ8000 ECO IQ10000 ECO IQ12000 ECO</i>		UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 XX ±.030 XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2° SURFACE FINISH 63		ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.	
MATERIAL <i>N/A</i>		EST WT: lbs		DRAWN BY <i>JWS</i>		DATE <i>4/15/2021</i>	
SCALE <i>1:12</i>		DESCRIPTION <i>IQ12000 ECO SPEC DRAWING</i>		DRAWING NUMBER <i>IQ352701</i>		REV <i>A</i>	