


IQ1200VXS
 COOLING CAPACITY: 1200 BTUH (352W) @131°F (55°C)
 MAXIMUM AMPS: 3.9 (468W) @120V/60HZ
 MAXIMUM AMPS: 1.8 (414W) @230V/60HZ
 MAXIMUM OPERATING TEMP: 131°F (55°C)
 MINIMUM OPERATING TEMP: -40°F (-40°C)
 DIMENSIONS: 30.00" (762MM) H X 6.50" (165MM) W X 11.50" (292MM) D
 WEIGHT: 45 LBS (20.5KG)

REV	REVISION	CHG	DATE	APP	DATE	CN #
D	UPDATED CUTOUT	SRZ	4/15/2020	NAT	4/28/2020	ECN-1429
C	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	3/26/2018			1351
B	ADDED WATTAGE INFO	RCC	12/29/2017			
A	REDRAWN IN SW	RCC	4/7/2017			

ITEM NUMBER	N/A	USED ON	IQ1200VXS
MATERIAL	N/A		
EST WT:	lbs		
DRAWN BY	RCC	DATE	4/7/2017
		SCALE	1:6


UNLESS OTHERWISE SPECIFIED TOLERANCES
 .X ±.060
 .XX ±.030
 .XXX ±.015
 FRACTIONAL ±1/16
 ANGULAR ±1/2°
 SURFACE FINISH 63

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
 DESCRIPTION
IQ1200VXS SPEC DRAWING
 DRAWING NUMBER
IQ280211
 REV
D

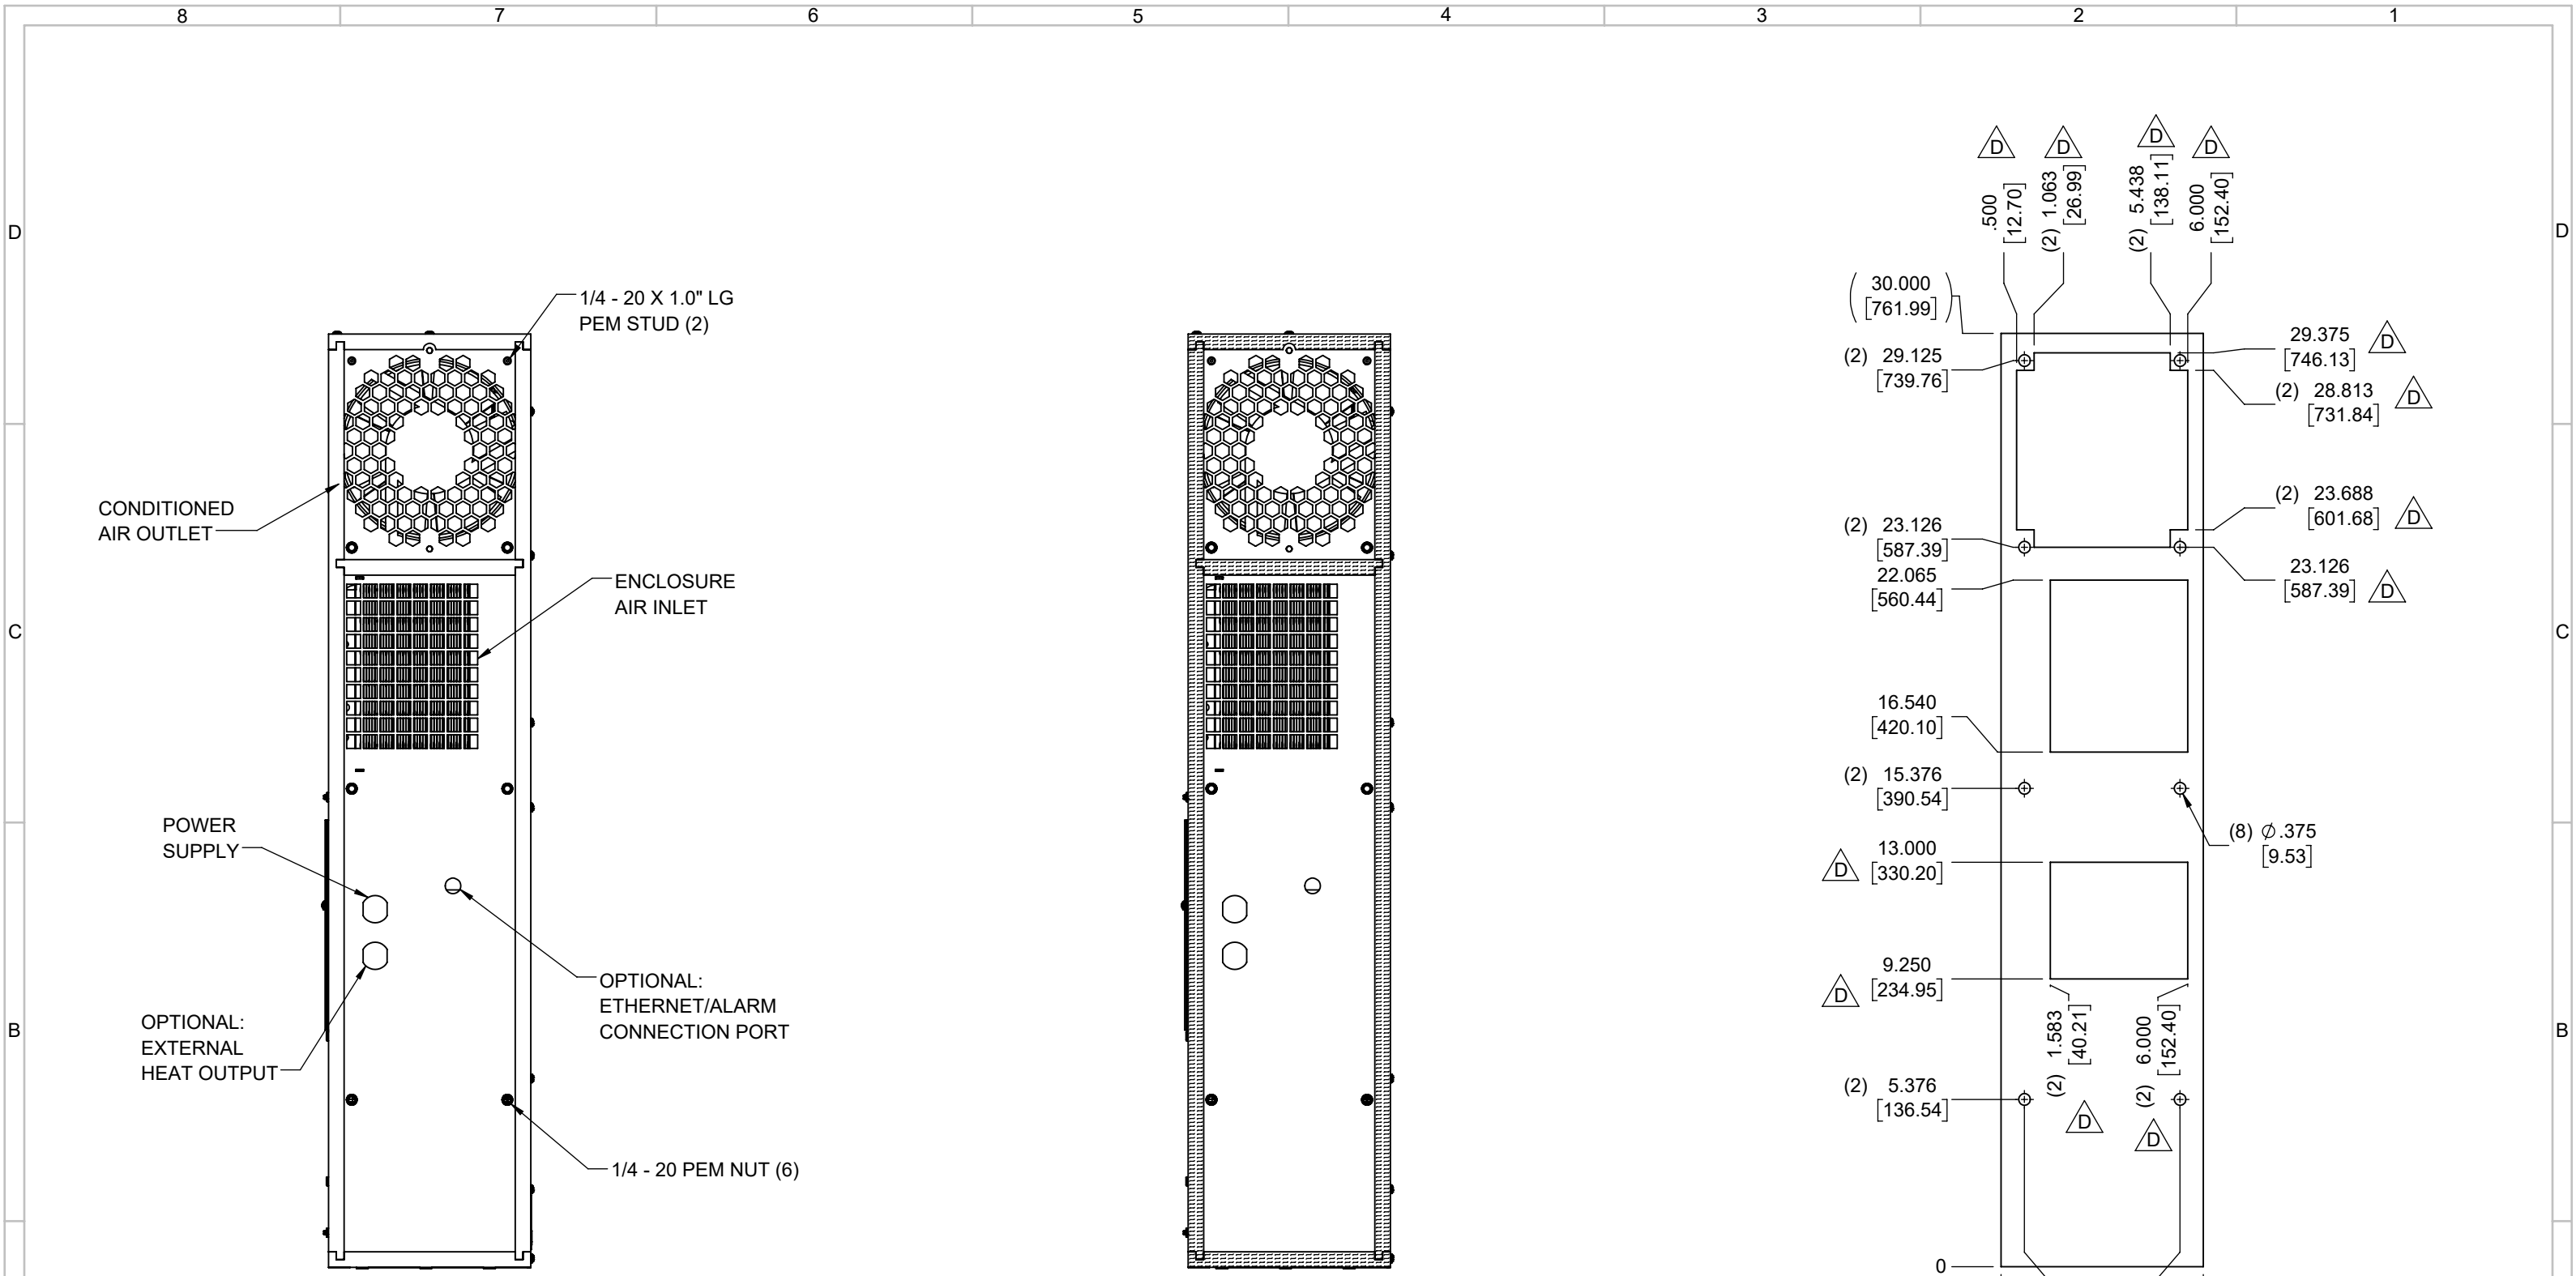

IMPORTANT
 GASKET MUST BE
 APPLIED AS SHOWN
 FOR PROPER OPERATION
 AND TO MAINTAIN
 NEMA INTEGRITY.

EVAP. OUTLET ≈ 190 CFM
 COND. OUTLET ≈ 158 CFM
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 60 dBA
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 61 dBA
 CONDENSER INLET MIN. CLEARANCE 2.08"

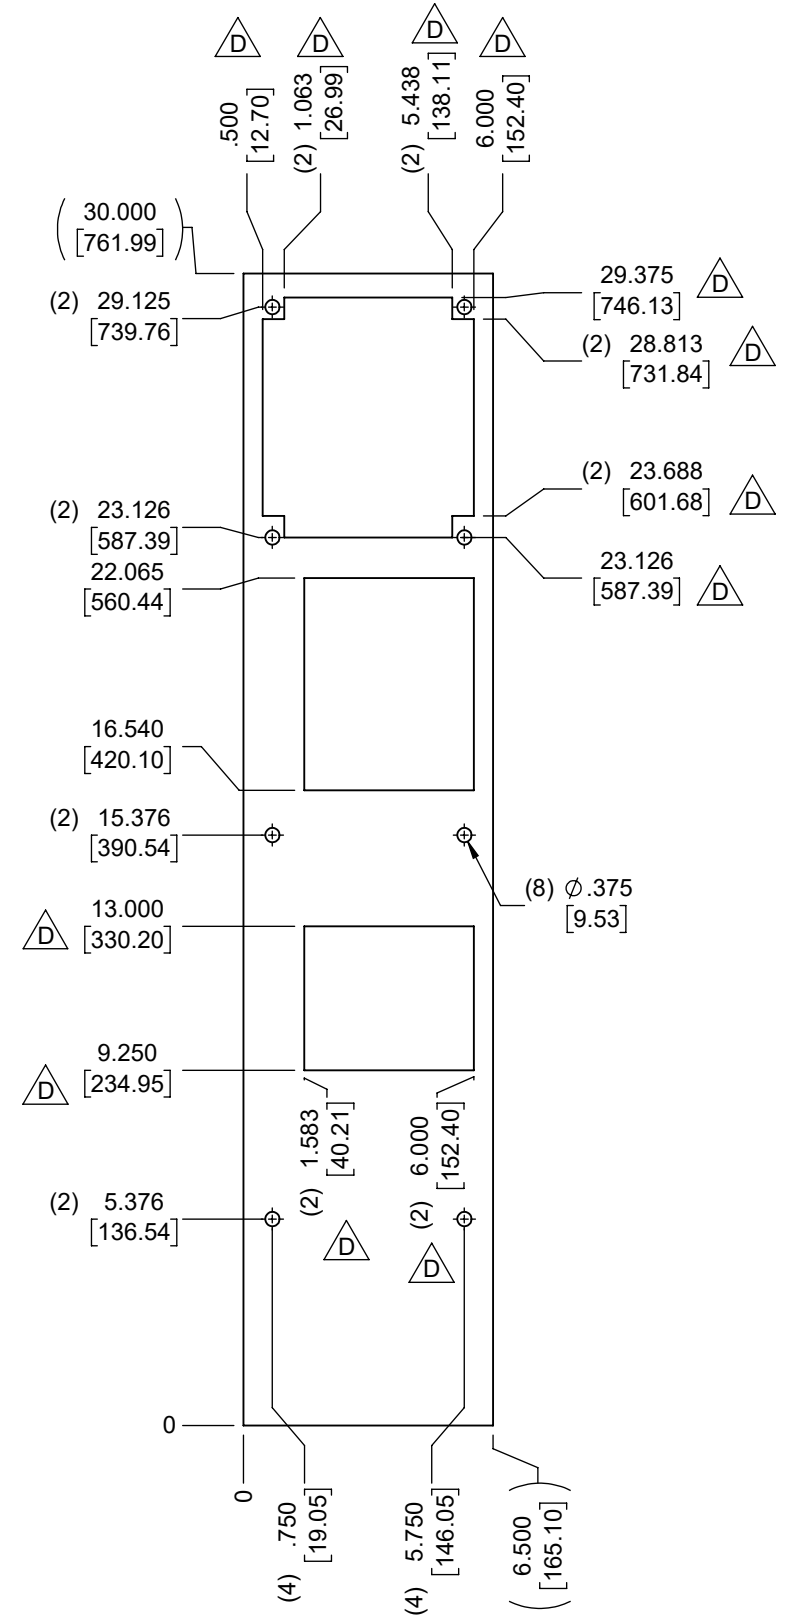

ITEM NUMBER N/A	USED ON IQ1200VXS	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°	<p>THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</p>
MATERIAL N/A		<p>EST WT: lbs</p> <p>DRAWN BY: RCC</p> <p>DATE: 4/7/2017</p> <p>SCALE: 1:5</p> <p>DO NOT SCALE DRAWING DIMENSIONS ARE INCHES</p>	
DESCRIPTION IQ1200VXS SPEC DRAWING			DRAWING NUMBER IQ280211
REV			D