




IQ1300MM-R  
 COOLING CAPACITY: 1300 BTUH (381W) @131°F (55°C)  
 MAXIMUM AMPS: 3.2 (384W) @120V/60HZ  
 MAXIMUM AMPS: 1.5 (345W) @230V/60HZ  
 MAXIMUM AMPS: 8.0 (384W) @48VDC  
 MAXIMUM AMPS: 10.6 (254W) @24VDC  
 MAXIMUM OPERATING TEMP: 131°F (55°C)  
 MINIMUM OPERATING TEMP: -40°F (-40°C)  
 DIMENSIONS: 15.06" (382MM) H X 6.08" (154MM) W X 6.30" (160MM) D  
 WEIGHT 120 & 230V: 21 LBS (9.5KG)  
 WEIGHT 24 & 48VDC: 13.8 LBS (6.3KG)

REV	REVISION	CHG	DATE	APP	DATE	CN #
D	UPDATED CUTOUT	RCC	3/6/2019			
C	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	3/30/2018			1351
B	ADDED WATTAGE INFO	RCC	1/5/2018			
A	REDRAWN IN SW	RCC	4/24/2017			

ITEM NUMBER	N/A	USED ON	IQ1300MM-R
MATERIAL	N/A		
EST WT:	lbs		
DRAWN BY	RCC	DATE	4/24/2017
		SCALE	1:4

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH $\sqrt{63}$	
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

**ICE QUBE, INC.**  
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.  
 DESCRIPTION  
**IQ1300MM-R SPEC DRAWING**  
 DRAWING NUMBER  
**IQ351451**  
 REV  
**D**

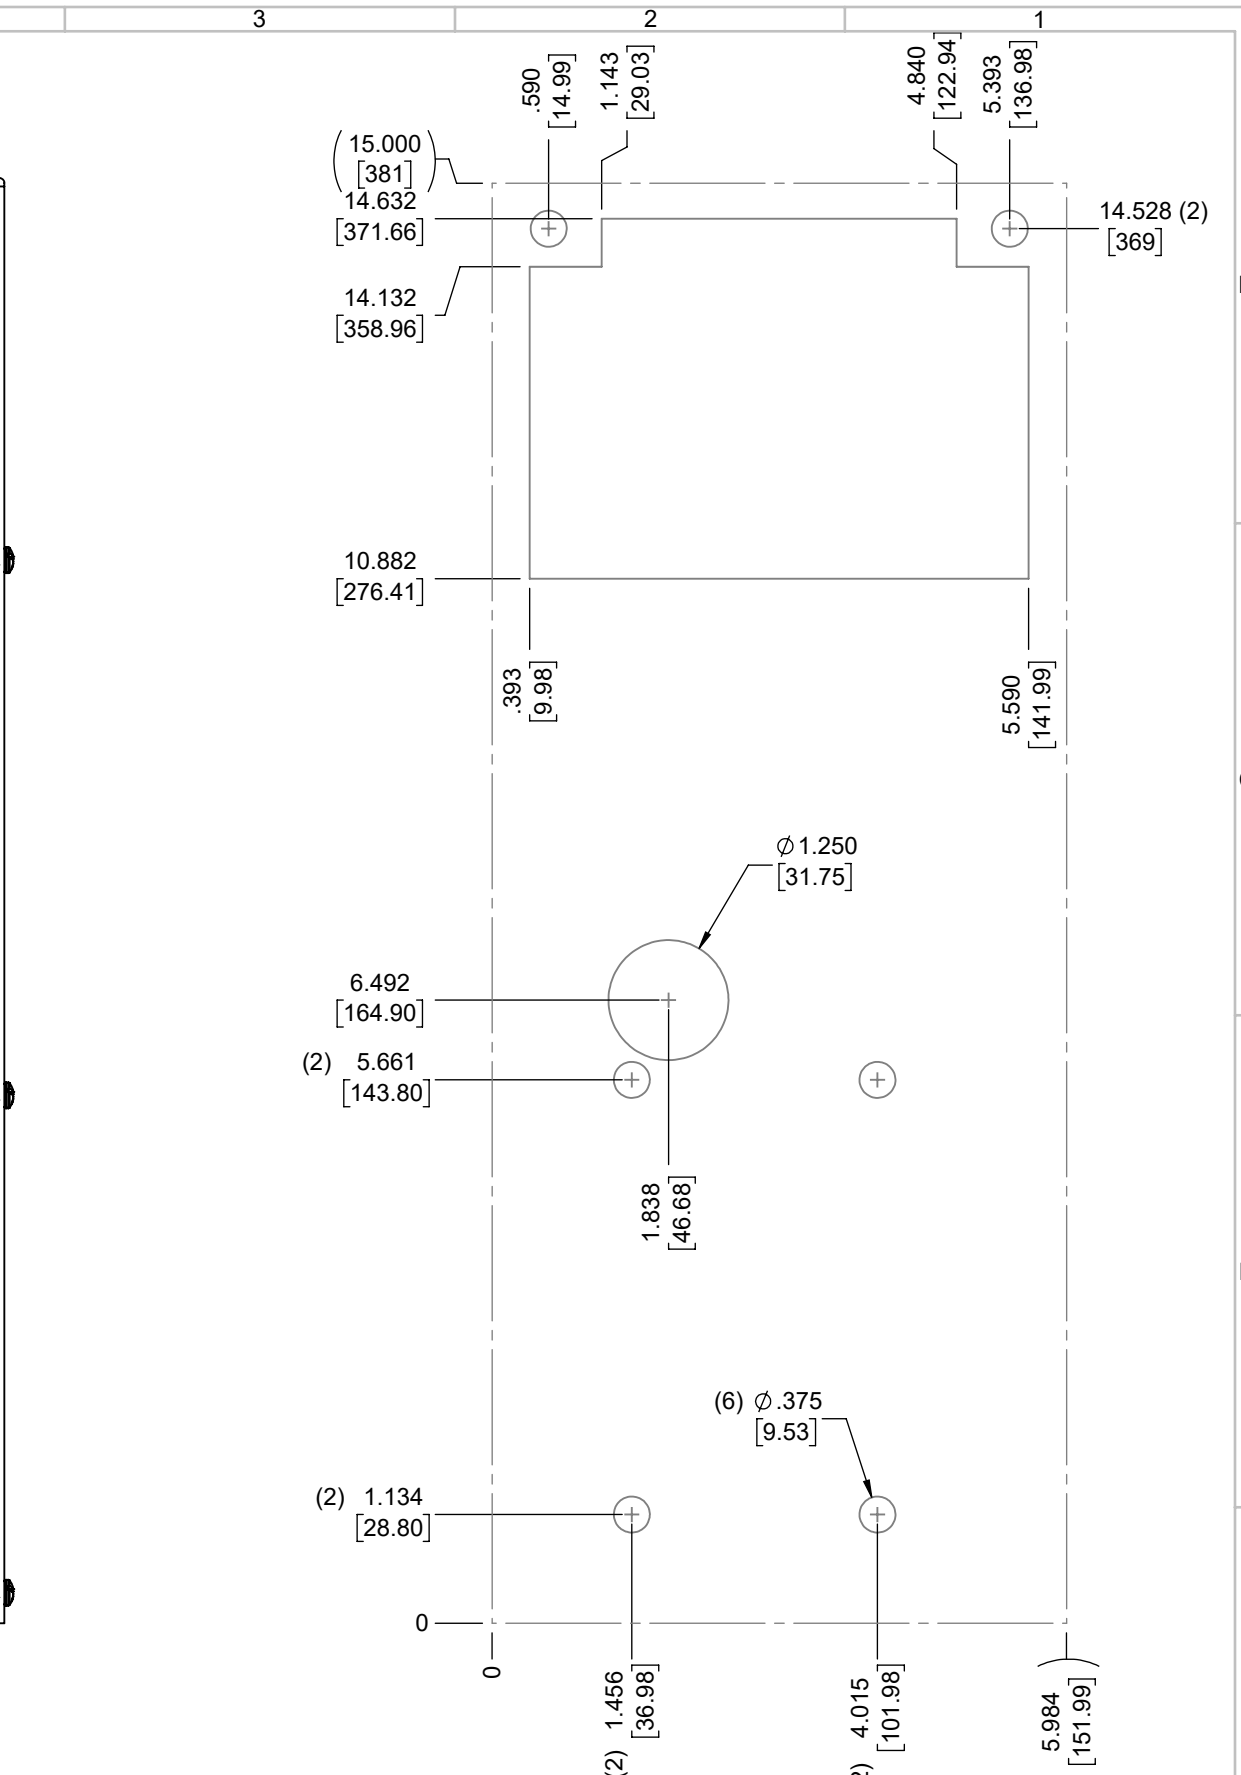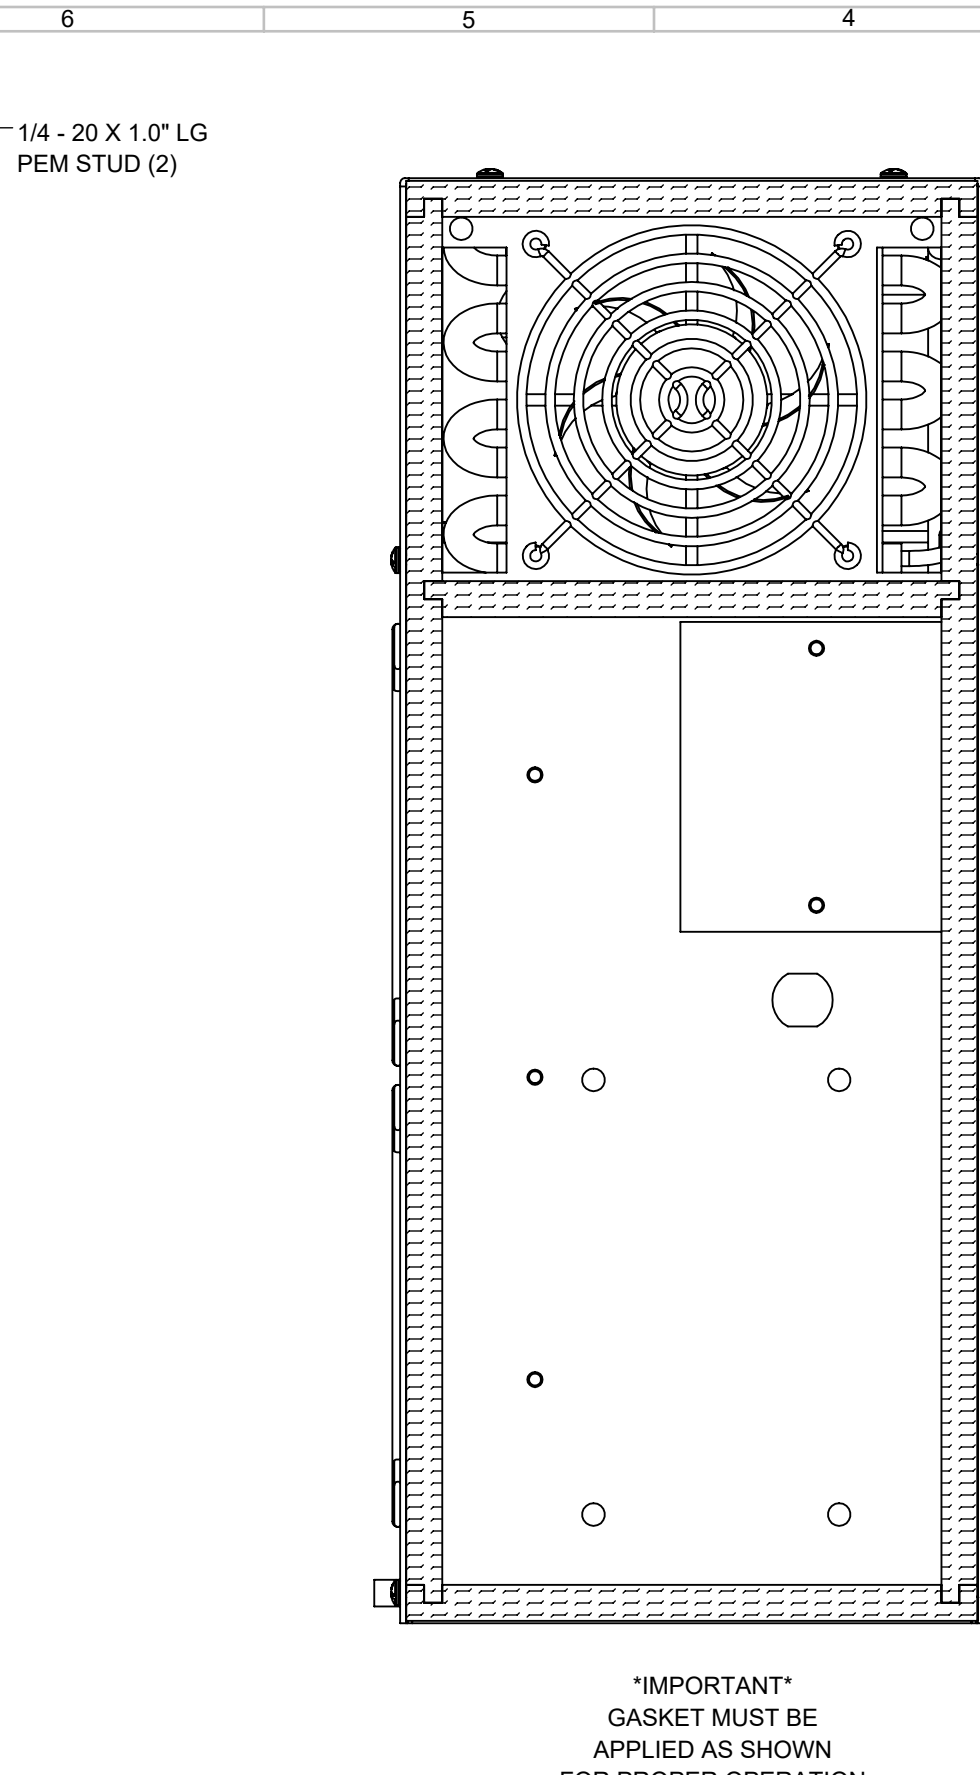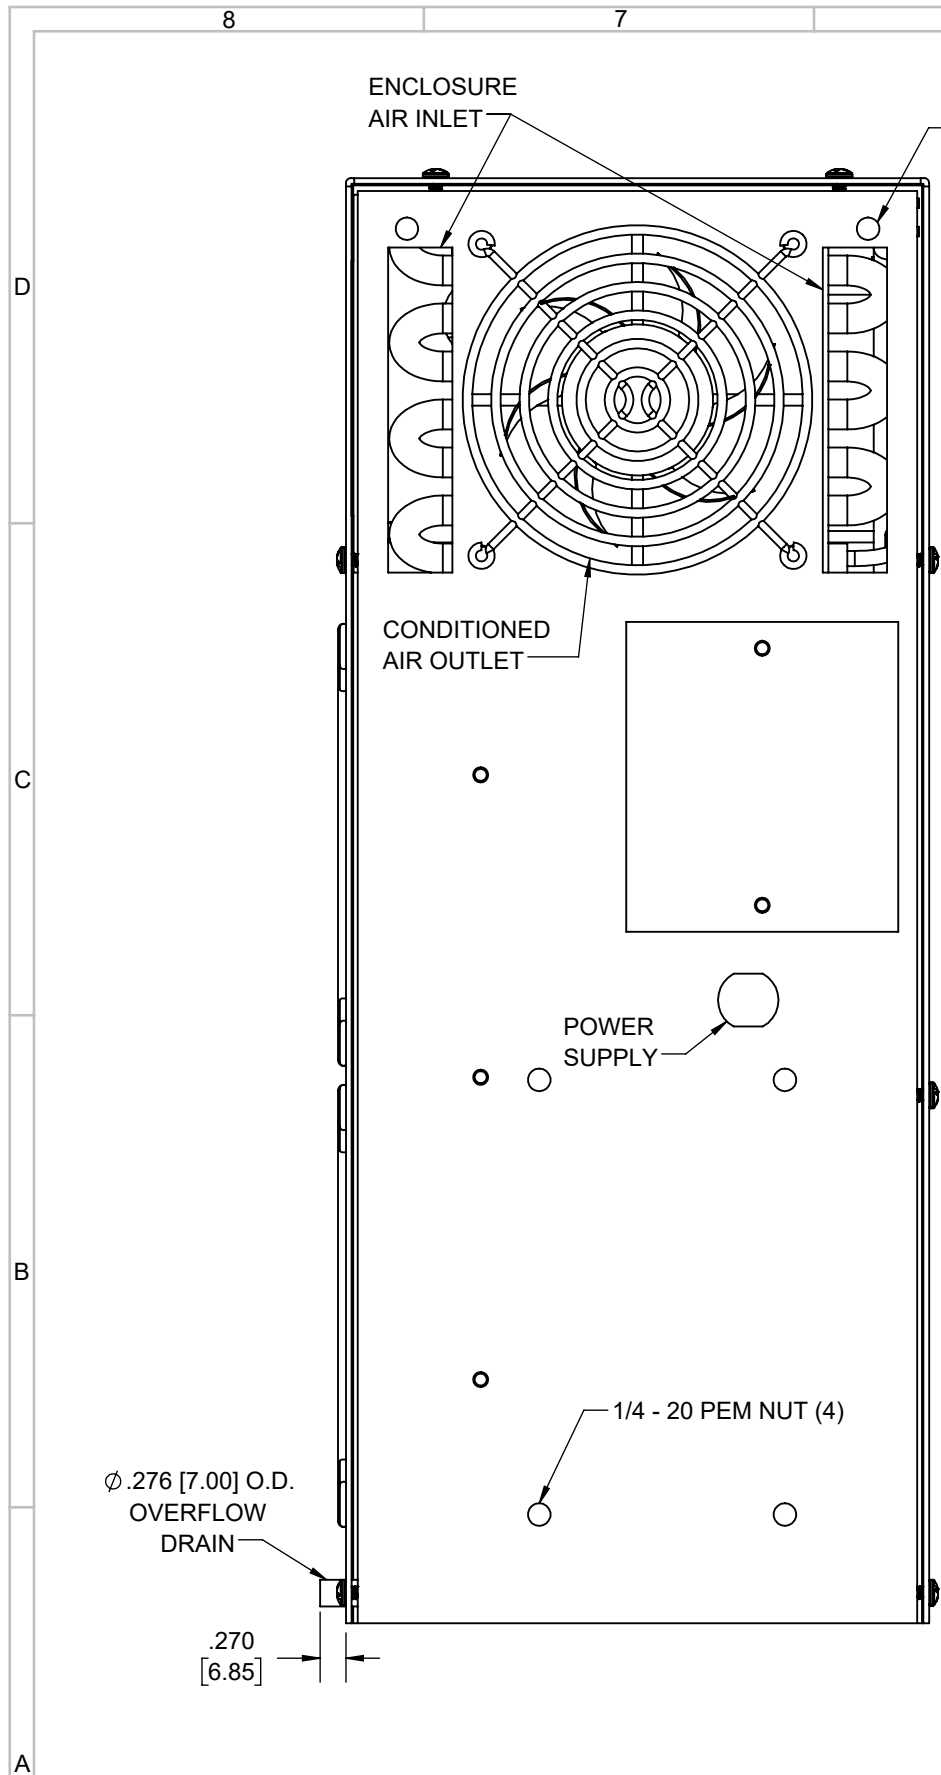

**\*IMPORTANT\***  
 GASKET MUST BE  
 APPLIED AS SHOWN  
 AND TO MAINTAIN  
 NEMA INTEGRITY.

EVAP. OUTLET ≈ 125 CFM  
 COND. OUTLET ≈ 210 CFM  
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 61 dBA  
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 61 dBA  
 CONDENSER INLET MIN. CLEARANCE 1.68"

ITEM NUMBER N/A	USED ON IQ1300MM-R	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 XX ±.030 XXX ±.015	<p>THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</p>
MATERIAL N/A		FRACTIONAL ANGULAR ±1/4 ±1/2	
EST WT: lbs	DATE 4/24/2017	SCALE 1:2	DESCRIPTION IQ1300MM-R SPEC DRAWING
DRAWN BY RCC			DRAWING NUMBER IQ351451
			REV D