


IQ1800VS
 COOLING CAPACITY: 1800 BTUH (528W) @131°F (55°C)
 MAXIMUM AMPS: 1.0 (480W) @480V/60HZ
 MAXIMUM OPERATING TEMP: 131°F (55°C)
 MINIMUM OPERATING TEMP: -40°F (-40°C)
 DIMENSIONS: 26.28" (668MM) H X 11.51" (292MM) W X 6.26" (159MM) D
 WEIGHT: 56 LBS (25.5KG)

REV	REVISION	CHG	DATE	APP	DATE	CN #
D	UPDATED CUTOUT	SRZ	4/8/2020	JWS	4/8/2020	ECN-1429
C	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	3/26/2018			1351
B	ADDED WATTAGE INFO	RCC	12/29/2017			
A	REDRAWN IN SW	RCC	4/6/2017			

ITEM NUMBER	N/A	USED ON	IQ1800VS
MATERIAL	N/A		
EST WT:	lbs		
DRAWN BY	RCC	DATE	04/06/2017
		SCALE	1:6

UNLESS OTHERWISE SPECIFIED TOLERANCES
 .X ±.060
 .XX ±.030
 .XXX ±.015
 FRACTIONAL ±1/16
 ANGULAR ±1/2°
 SURFACE FINISH 63
 DO NOT SCALE DRAWING DIMENSIONS ARE INCHES

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
 DESCRIPTION
IQ1800VS SPEC DRAWING, 480V
 DRAWING NUMBER
IQ351402
 REV
D

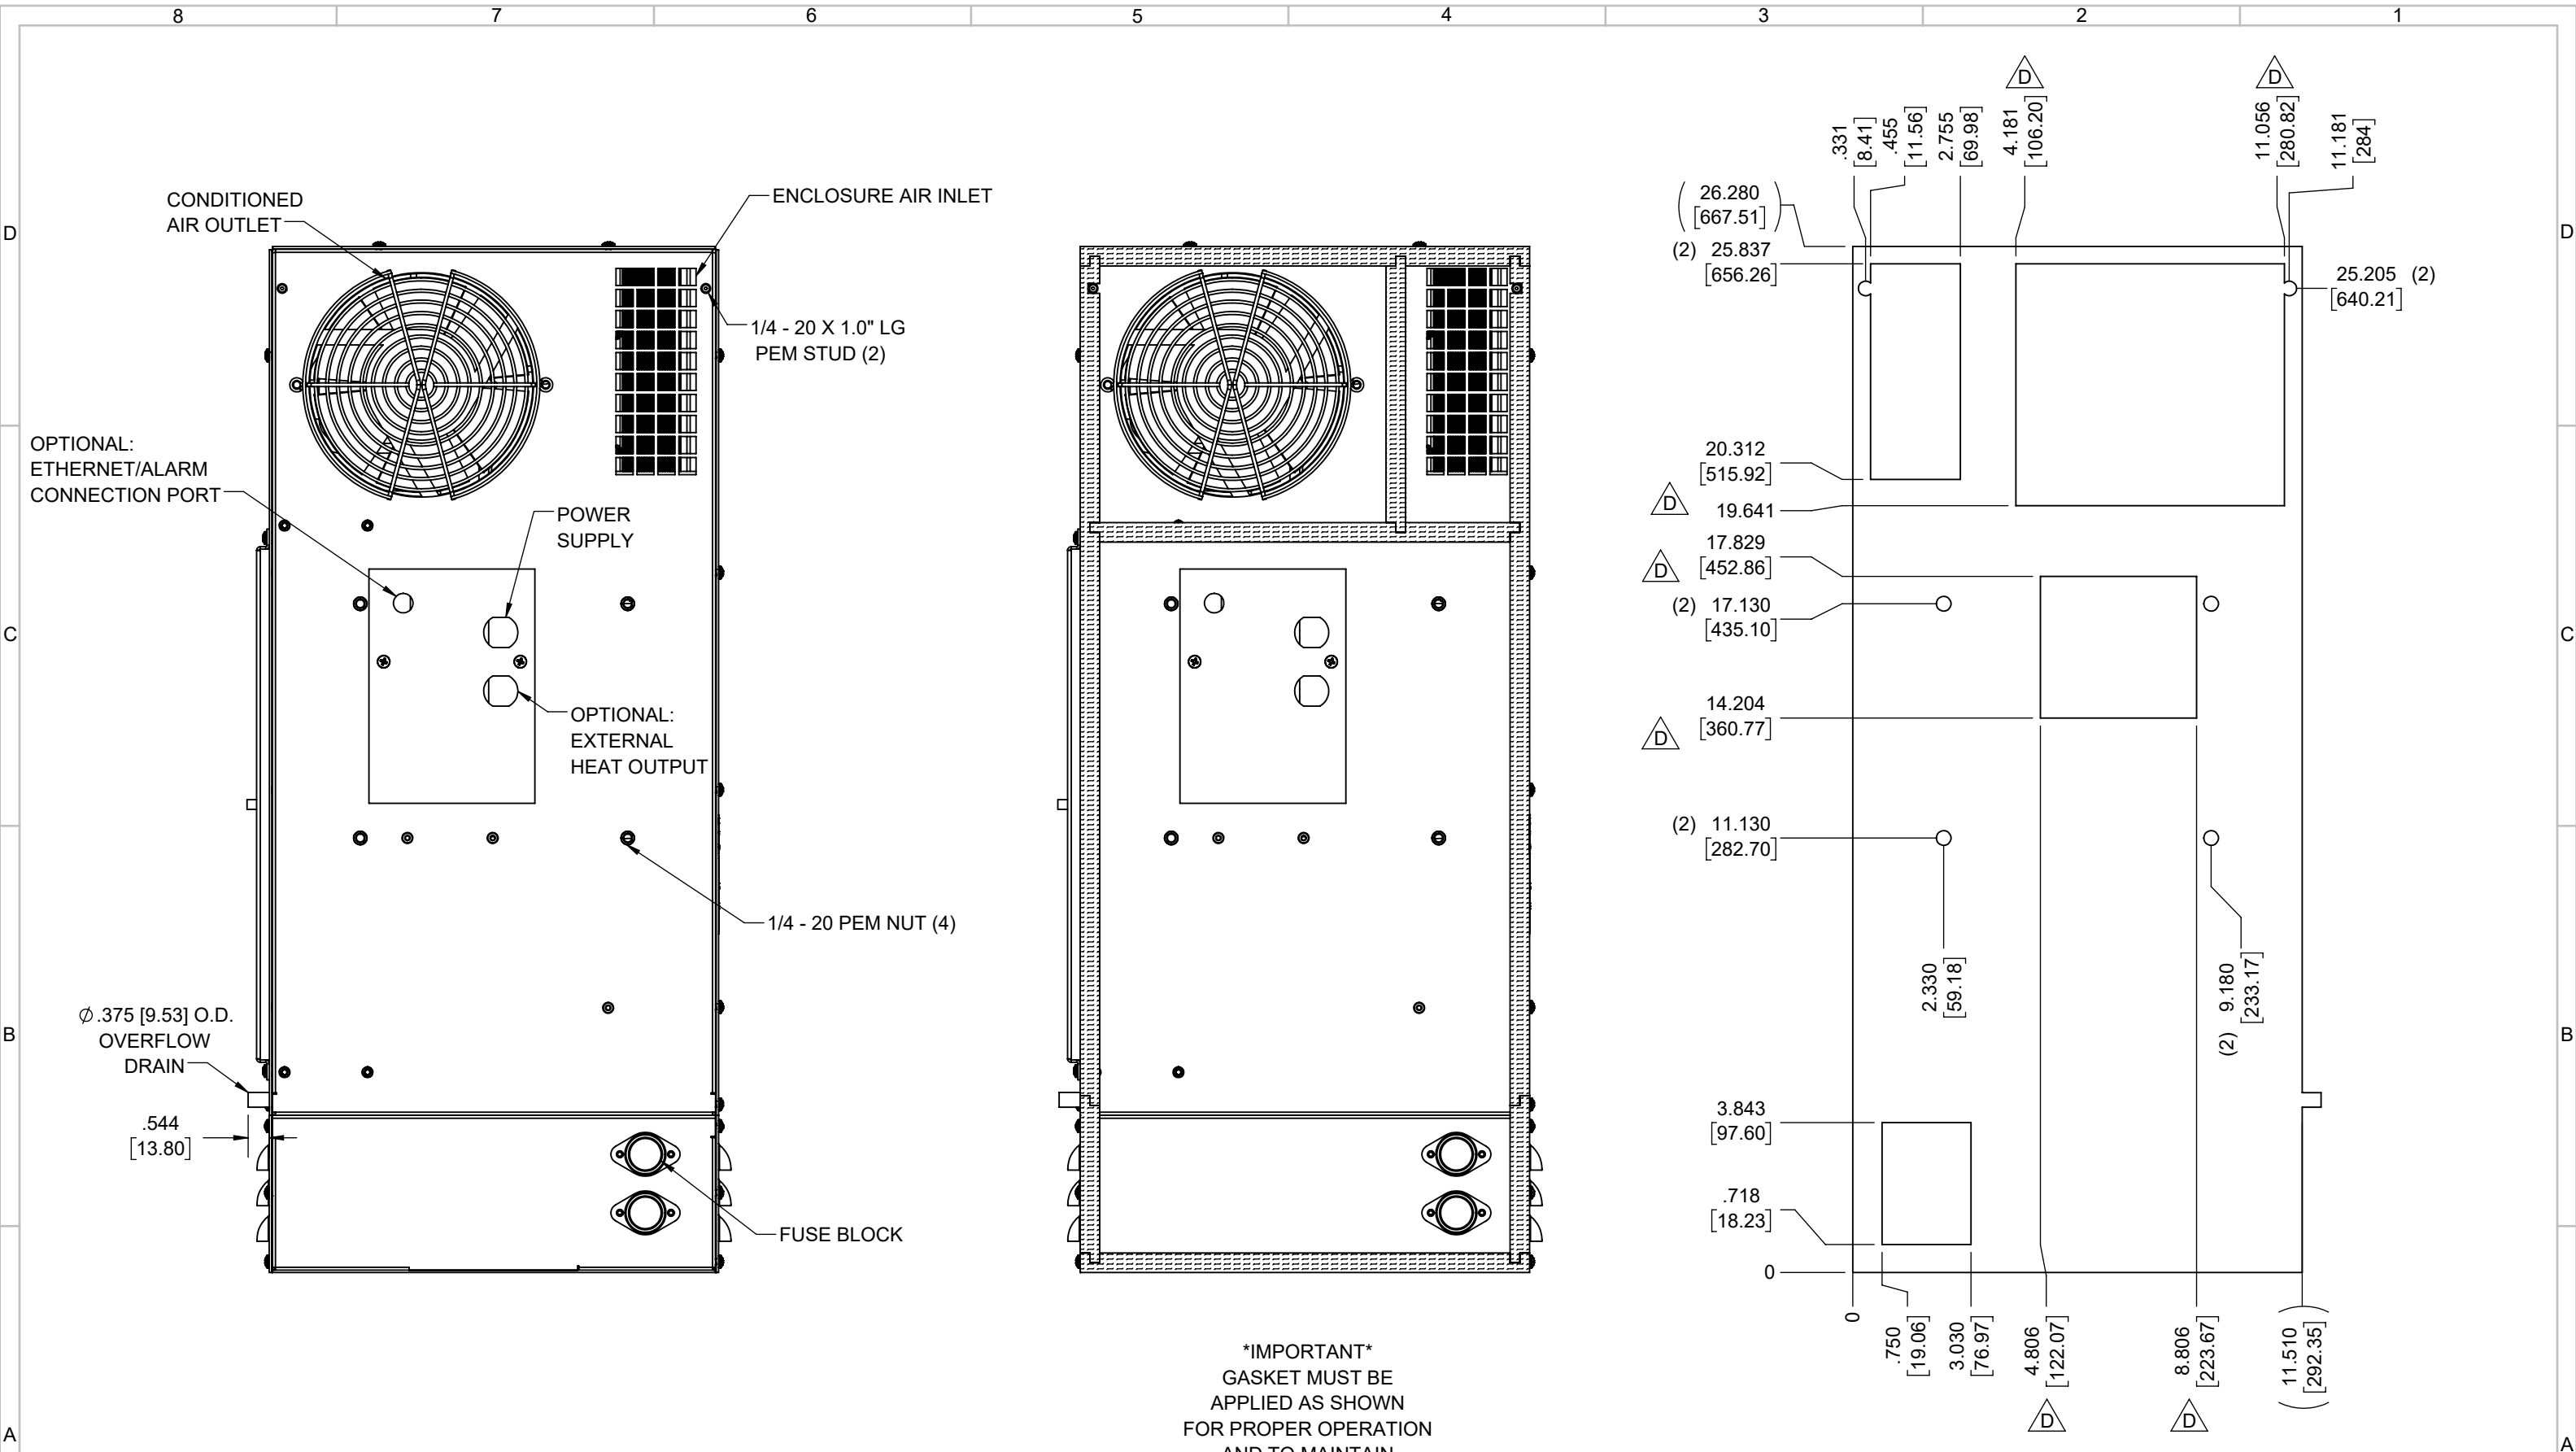

IMPORTANT
GASKET MUST BE APPLIED AS SHOWN FOR PROPER OPERATION AND TO MAINTAIN NEMA INTEGRITY.

EVAP. OUTLET ≈ 190 CFM
COND. OUTLET ≈ 158 CFM
SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 60 dBA
SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 61 dBA
CONDENSER INLET MIN. CLEARANCE 2.08"

ITEM NUMBER N/A	USED ON IQ1800VS	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°	<p>ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</p>
MATERIAL N/A		DESCRIPTION IQ1800VS SPEC DRAWING, 480V	
EST WT: DRAWN BY RCC	DATE 04/06/2017	SCALE 1:4	DRAWING NUMBER IQ351402
SURFACE FINISH 63			REV D
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES			