

**IQ1800VXS**  
 COOLING CAPACITY: 1800 BTUH (528W) @131 °F (55 °C)  
 MAXIMUM AMPS: 1.0 (480W) @480V/60HZ  
 MAXIMUM OPERATING TEMP: 131 °F (55 °C)  
 MINIMUM OPERATING TEMP: -40 °F (-40 °C)  
 DIMENSIONS: 34.03" (864MM) H X 6.50" (165MM) W X 11.50" (292MM) D  
 WEIGHT: 59 LBS (26.8KG)


REV	REVISION	CHG	DATE	APP	DATE	CN #
D	REVISED CUTOUT	SRZ	4/15/2020	NAT	4/29/2020	ECN-429
C	ADDED CFM, dBA, AND CLEARANCE	RCC	3/26/2018			1351
B	ADDED WATTAGE INFO	RCC	1/2/2018			
A	REDRAWN IN SW	RCC	4/7/2017			

ITEM NUMBER  
*N/A*  
 MATERIAL  
*N/A*  
 EST WT: lbs  
 DRAWN BY  
*RCC*  
 DATE  
*4/7/2017*  
 SCALE  
*1:7*

USED ON  
*IQ1800VXS*  
 SURFACE FINISH  
 63

UNLESS OTHERWISE SPECIFIED TOLERANCES  
 .X ±.060  
 .XX ±.030  
 .XXX ±.015  
 FRACTIONAL ±1/16  
 ANGULAR ±1/2°  
 DO NOT SCALE DRAWING DIMENSIONS ARE INCHES

**ICE QUBE, INC.**  
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.  
 DESCRIPTION  
**IQ1800VXS SPEC DRAWING, 480V**  
 DRAWING NUMBER  
**IQ351406**  
 REV  
**D**

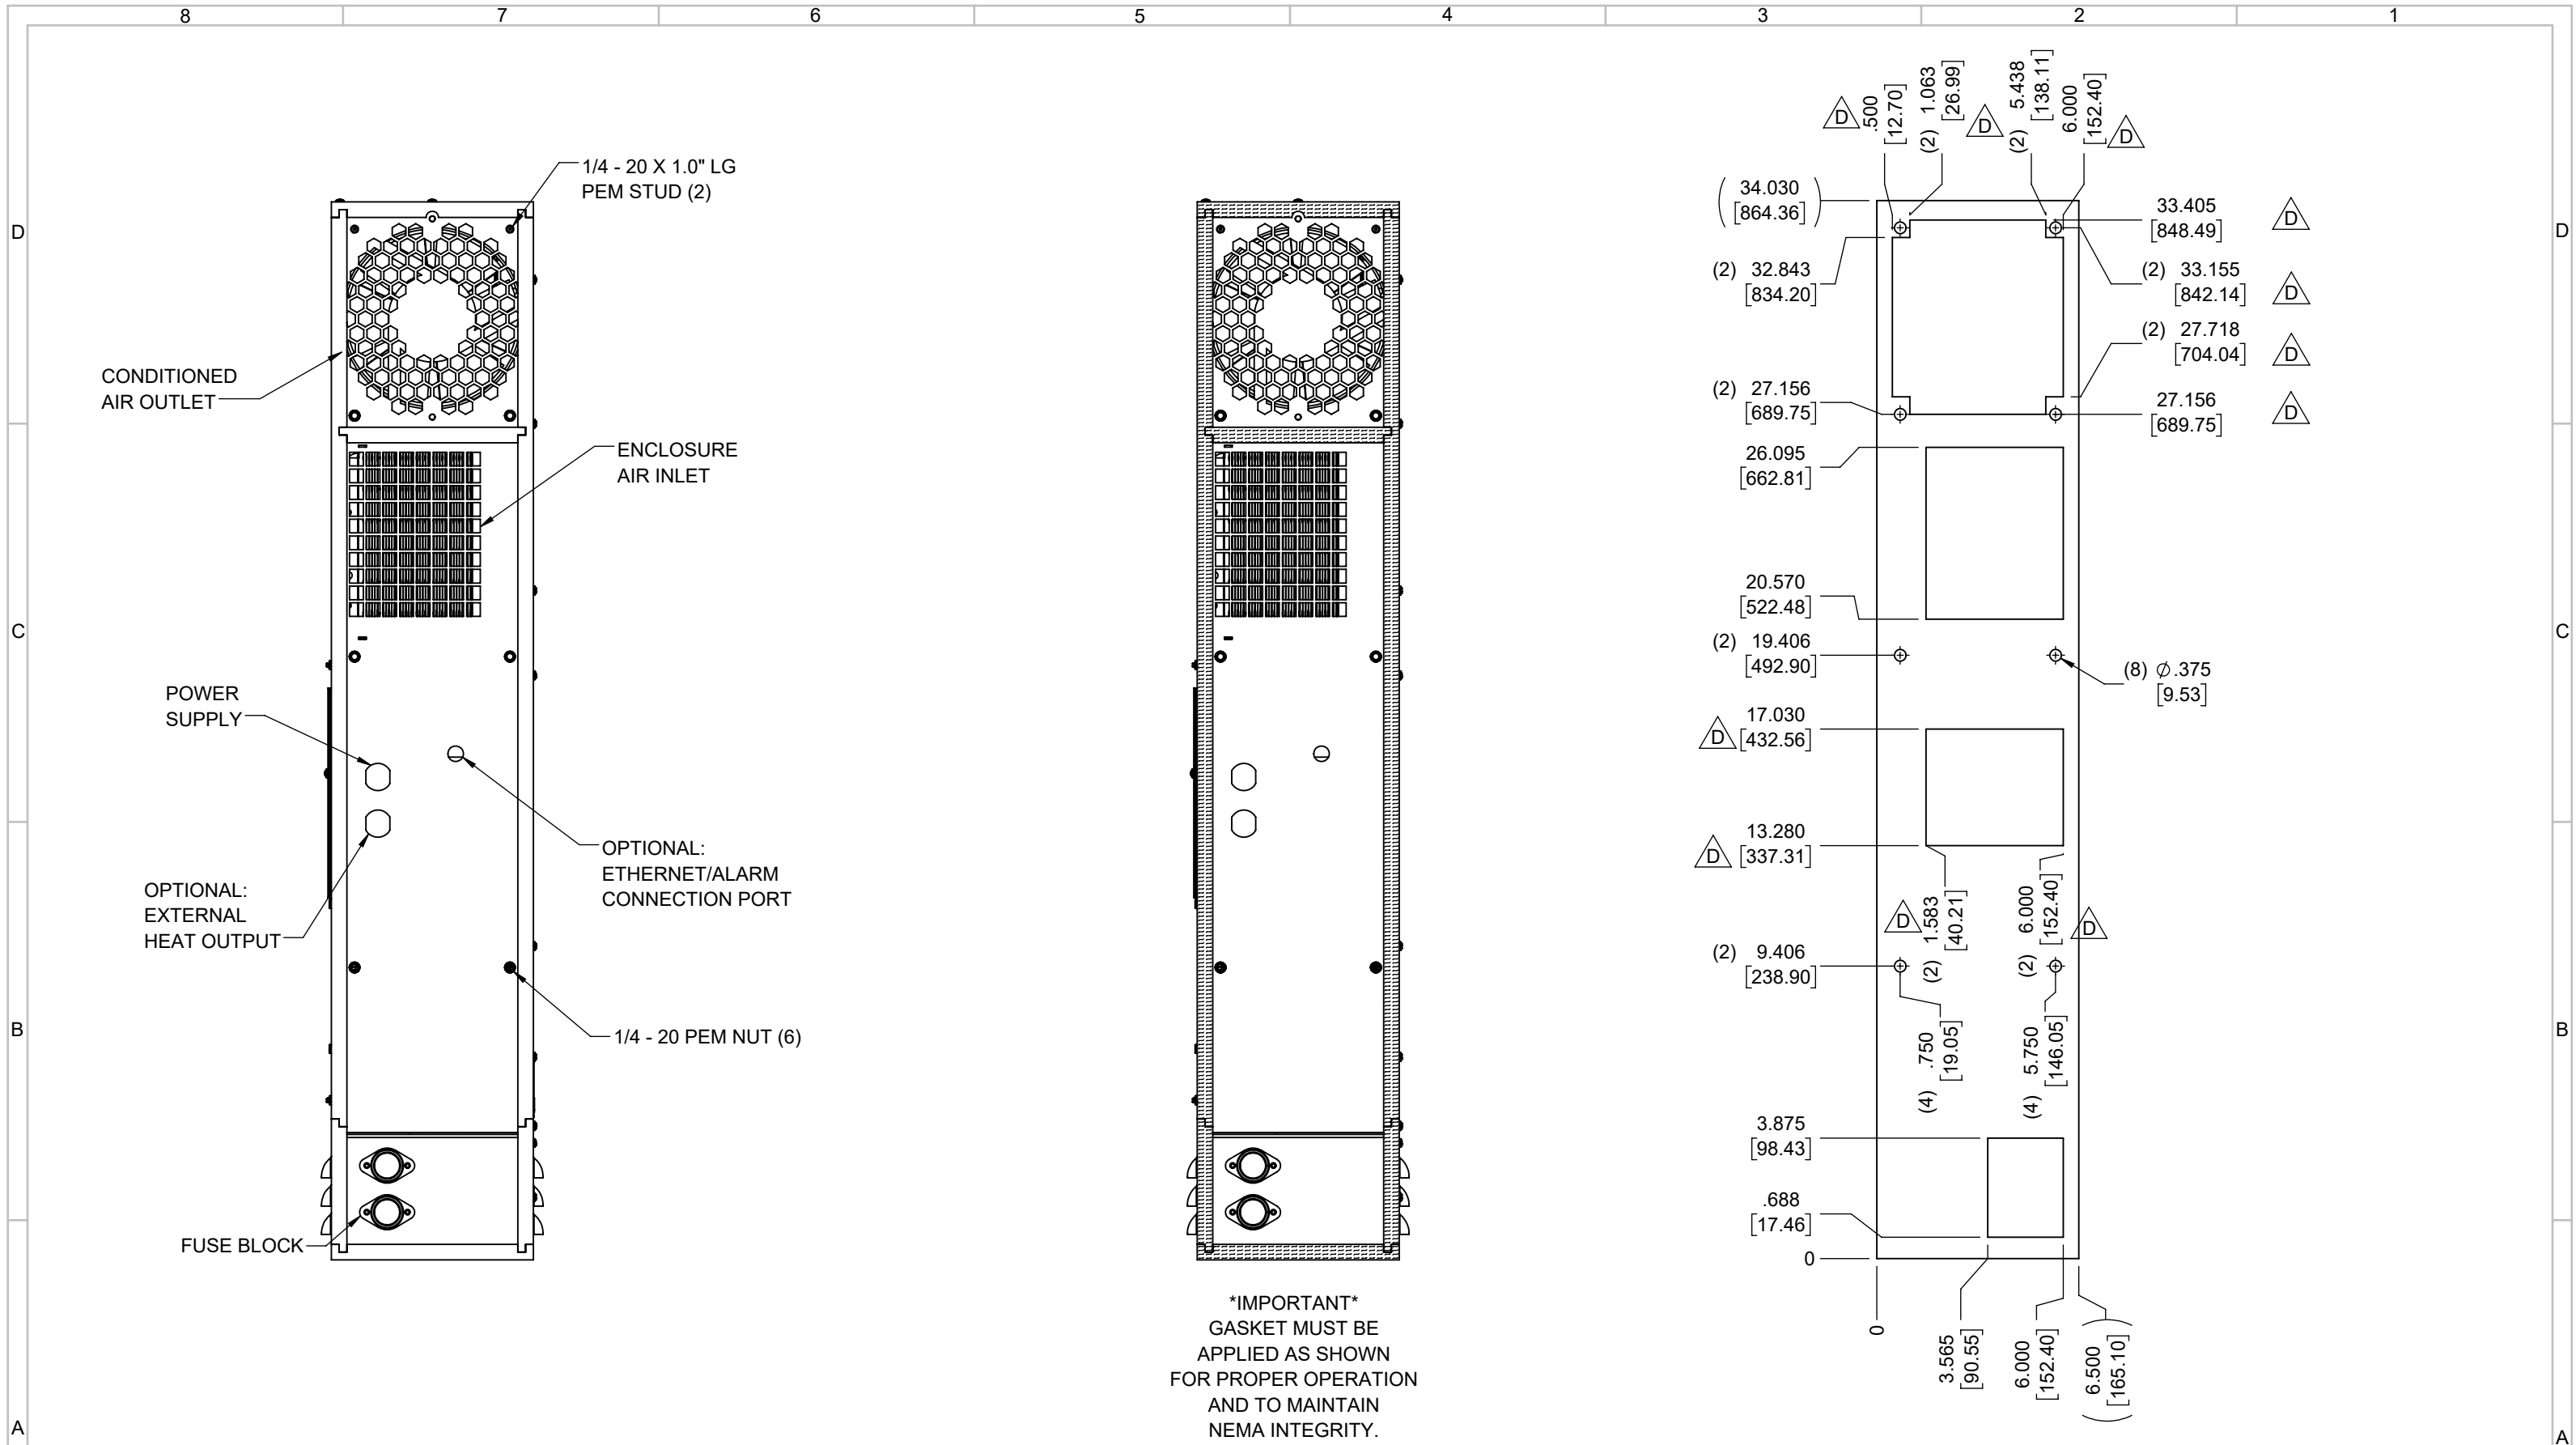

EVAP. OUTLET ≈ 190 CFM  
 COND. OUTLET ≈ 158 CFM  
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 60 dBA  
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 61 dBA  
 CONDENSER INLET MIN. CLEARANCE 2.08"

ITEM NUMBER N/A	USED ON IQ1800VXS	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°	<p>THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</p>
MATERIAL N/A		DESCRIPTION IQ1800VXS SPEC DRAWING, 480V	
EST WT: lbs	DRAWN BY RCC	DATE 4/7/2017	DRAWING NUMBER IQ351406
		SCALE 1:5	REV D