




MODEL: **IQ2000ECO**
NOMINAL COOLING CAPACITY:
2327 BTUH (682W) @ 131-131°F (55°C-55°C) @ 120V/60Hz
1996 BTUH (585W) @ 95-95°F (35°C-35°C) @ 120V/60Hz
2377 BTUH (696W) @ 131-131°F (55°C-55°C) @ 230V/60Hz
1960 BTUH (575W) @ 95-95°F (35°C-35°C) @ 230V/60Hz
MAX COOLING AMPS: 3.4 (408W) @ 120V/60Hz
MAX COOLING AMPS: 1.7 (391W) @230V/60Hz
HEAT AMPS: (500W) HEATER: 4.60 @120V/60Hz
HEAT AMPS: (500W) HEATER: 2.39 @ 230V/60Hz
MAXIMUM OPERATION TEMPERATURE: 131°F (55°C) 120V/230V
DIMENSIONS: 20.220" (513MM) H x 9.760" (248MM) W x 10.924" (277MM) D
DIMENSIONS: 20.220" (513MM) H x 9.760" (248MM) W x 11.249" (285MM) D: W/FILTER COVER
WEIGHT : 52 LBS (23.6 KG) @ 120/230V
REFRIGERANT CHARGE: R134-A 10 OZ (283 G) @ 120V/Hz 230V/Hz

ITEM NUMBER N/A						USED ON IQ1-2-3000 ECO		UNLESS OTHERWISE SPECIFIED TOLERANCES .X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/16 ANGULAR ±1/2° SURFACE FINISH 63		ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.	
MATERIAL N/A						EST WT: lbs		DO NOT SCALE DRAWING DIMENSIONS ARE INCHES		DRAWING NUMBER IQ2000ECO SPEC DRAWING	
DRAWN BY JWS						DATE 10/20/2020		SCALE 1:7		REV B	
B	ADDED HEAT 500W AND AMPS				JWS	9/22/2021					
A	INITIAL DRAFT				JWS	10/14/2020					
REV	REVISION				CHG	DATE	APP	DATE	CN #		

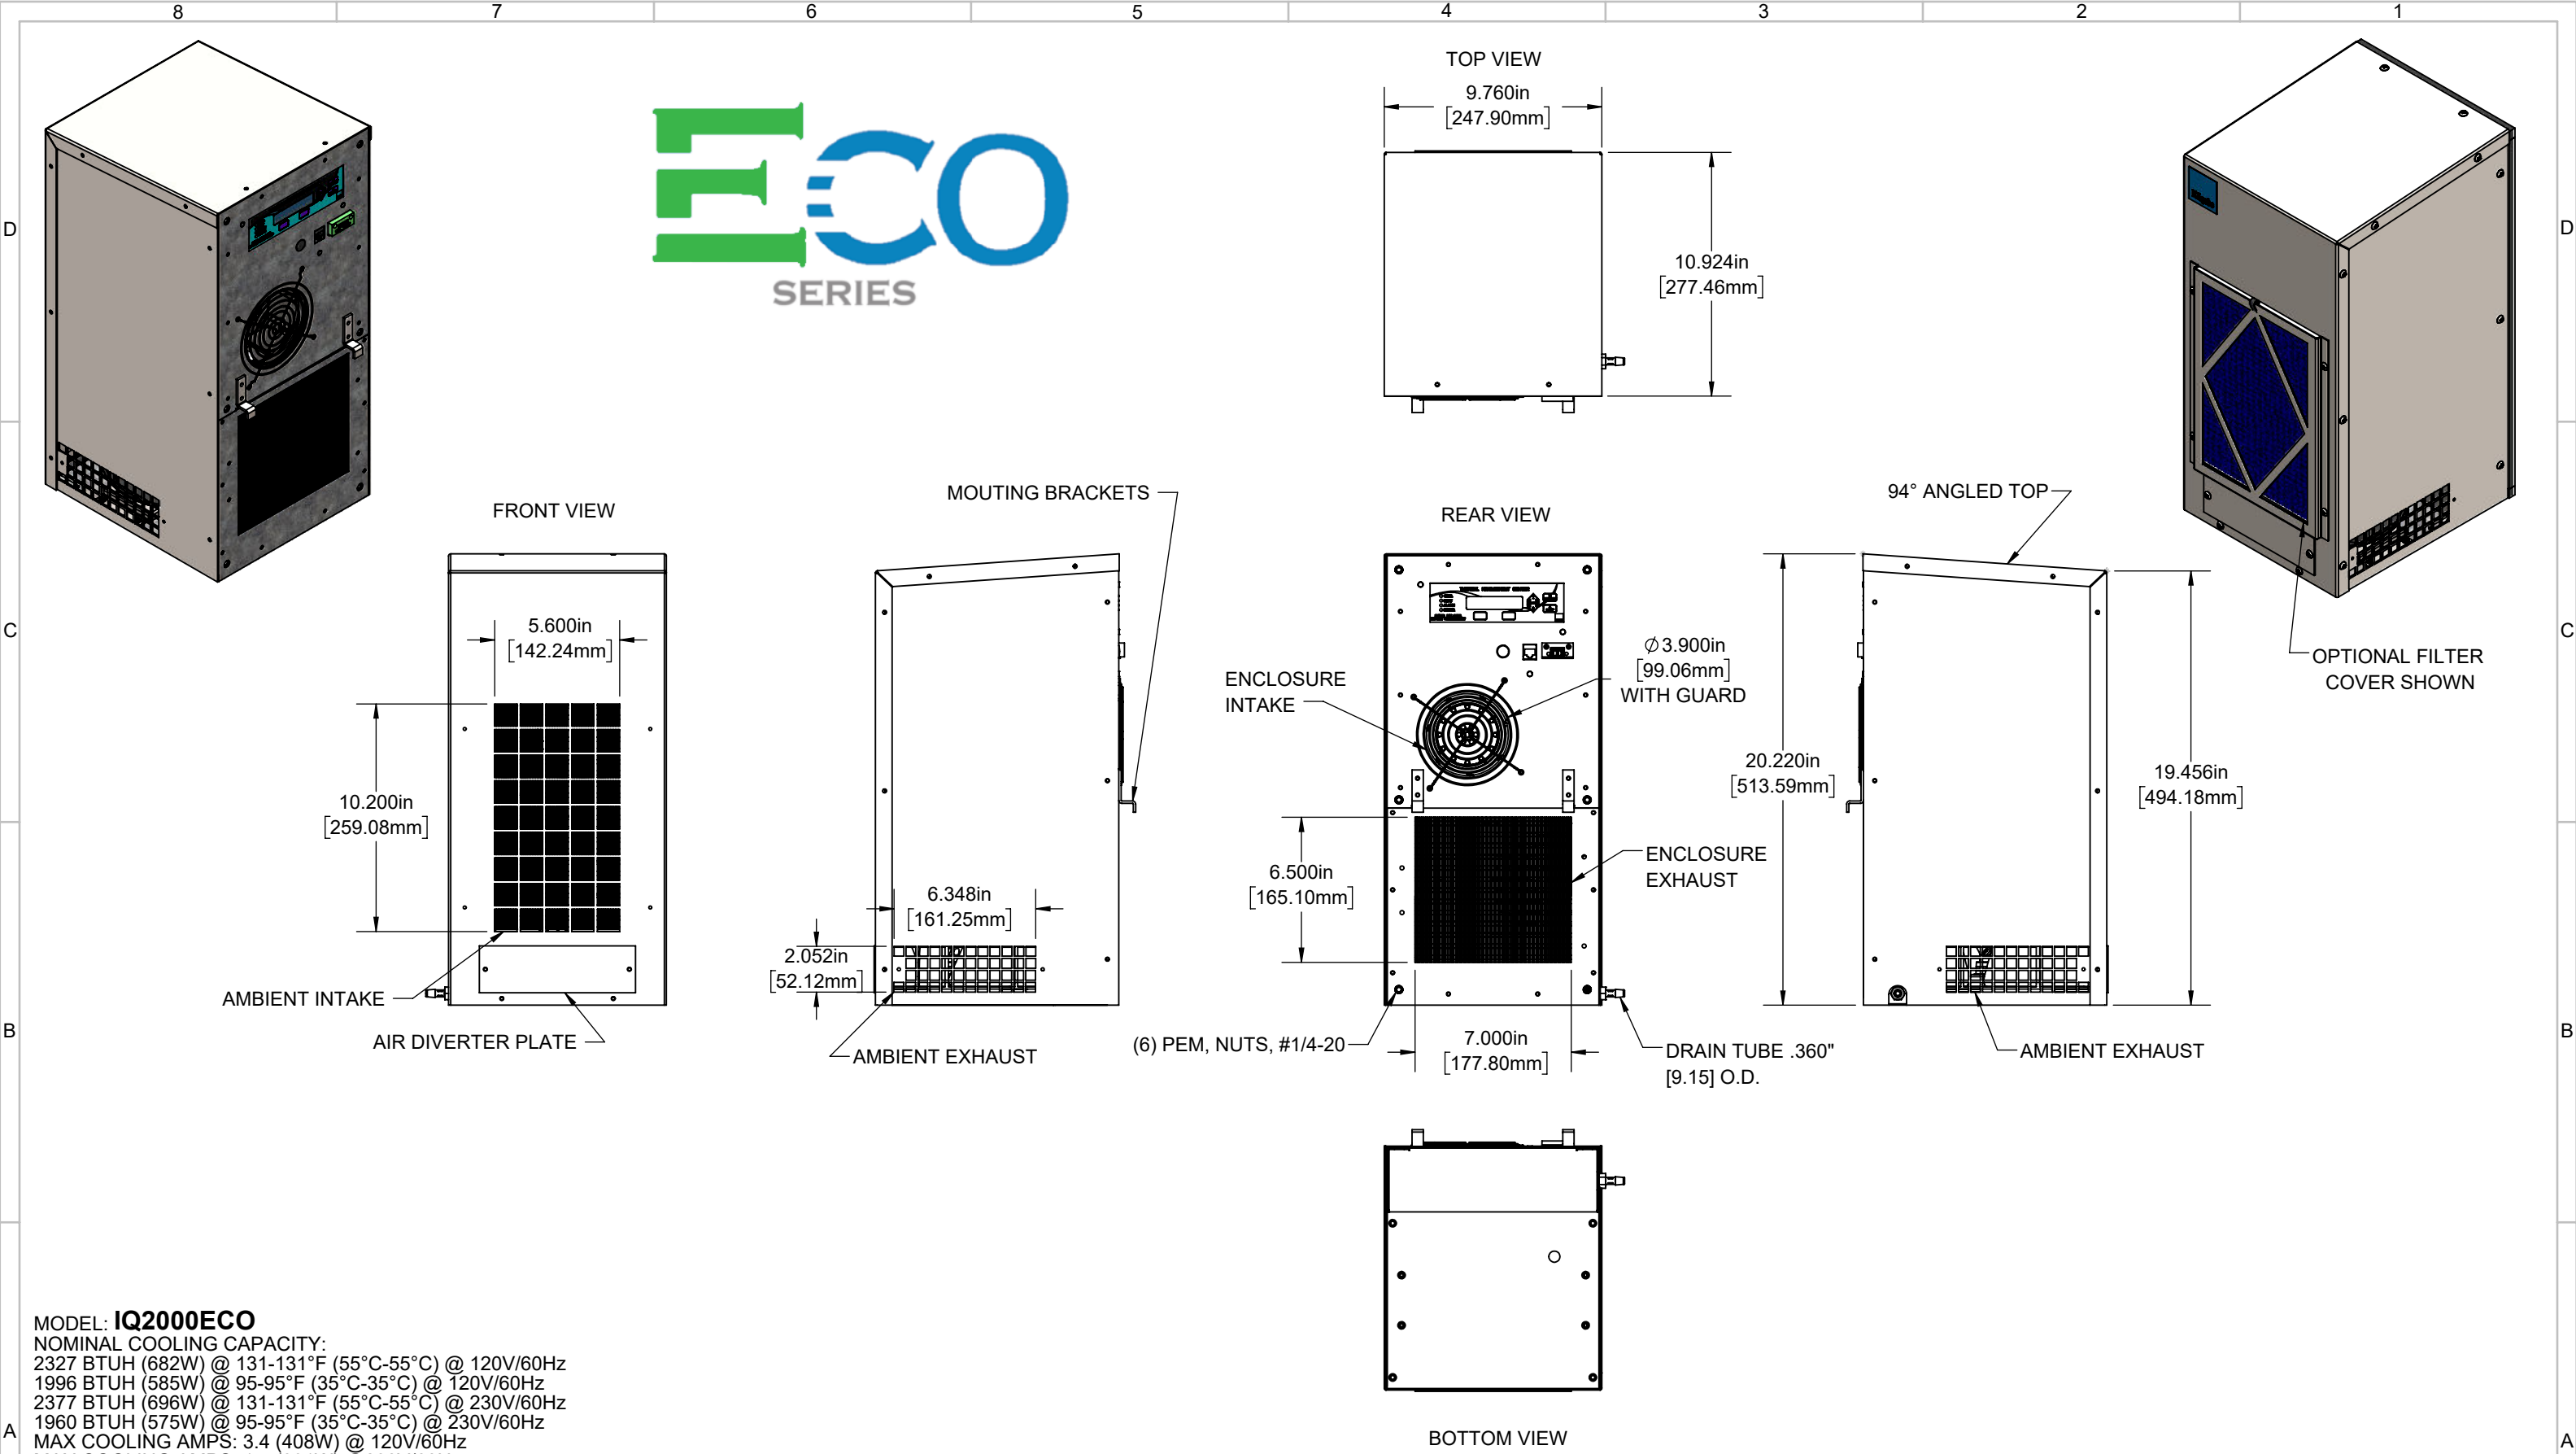