

IQ3000T
 COOLING CAPACITY: 3000 BTUH (880W) @131°F (55°C)
 MAXIMUM AMPS: 7.5 (900W) @120V/60HZ
 MAXIMUM AMPS: 3.9 (897W) @230V/60HZ
 MAXIMUM OPERATING TEMP: 131°F (55°C)
 MINIMUM OPERATING TEMP: -40°F (-40°C)
 DIMENSIONS: 12.06" (306MM) H X 19.94" (507MM) W X 20.06" (510MM) D
 WEIGHT: 72 LBS (32.7KG)

REV	REVISION	CHG	DATE	APP	DATE	CN #
C	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	3/28/2018			1351
B	ADDED WATTAGE INFO	RCC	1/3/2018			
A	REDRAWN IN SW	RCC	4/19/2017			

ITEM NUMBER	N/A	USED ON	IQ3000T
MATERIAL	N/A		
EST WT:	lbs		
DRAWN BY	RCC	DATE	4/19/2017
		SCALE	1:8

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH $\sqrt{63}$	
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
 DESCRIPTION
IQ3000T SPEC DRAWING
 DRAWING NUMBER
IQ320702
 REV
C

8 7 6 5 4 3 2 1



D

C


B

A

EVAP. OUTLET ≈ 236 CFM
 COND. OUTLET ≈ 410 CFM
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 59 dBA
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 59 dBA
 CONDENSER INLET MIN. CLEARANCE 2.76"

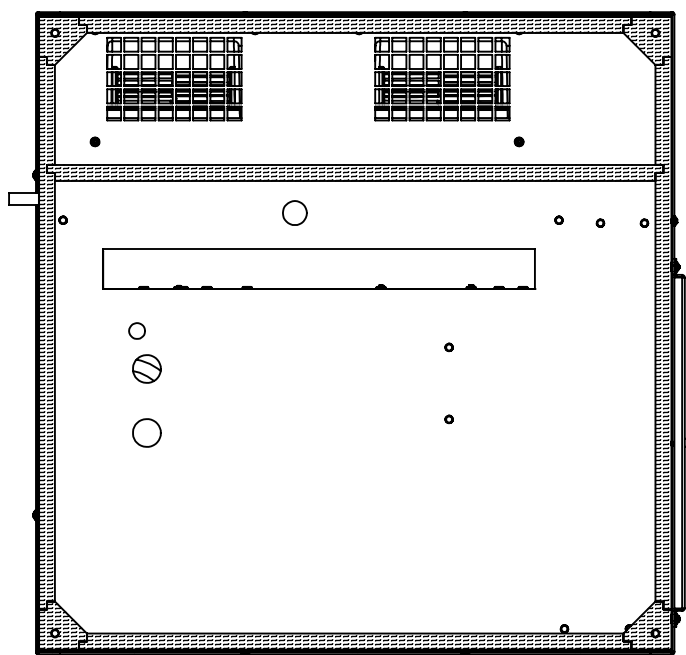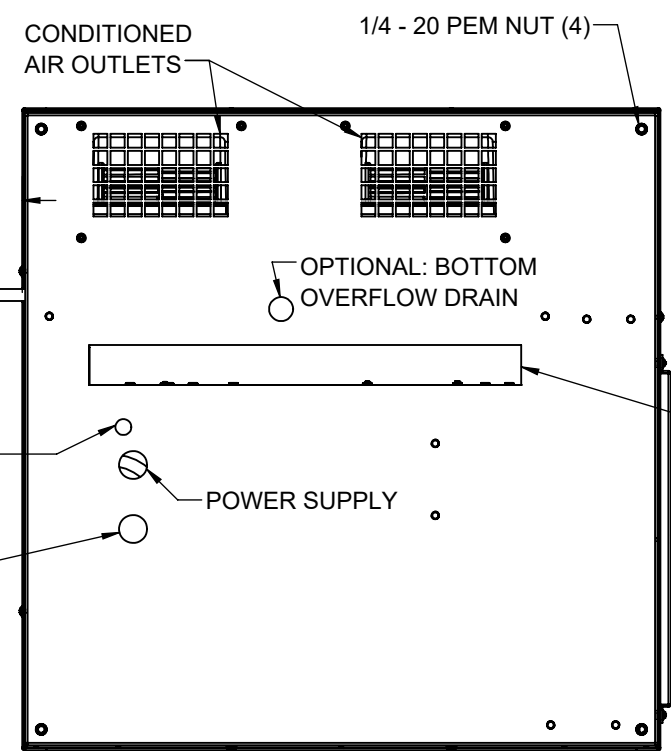

IMPORTANT
 GASKET MUST BE APPLIED AS SHOWN FOR PROPER OPERATION AND TO MAINTAIN NEMA INTEGRITY.

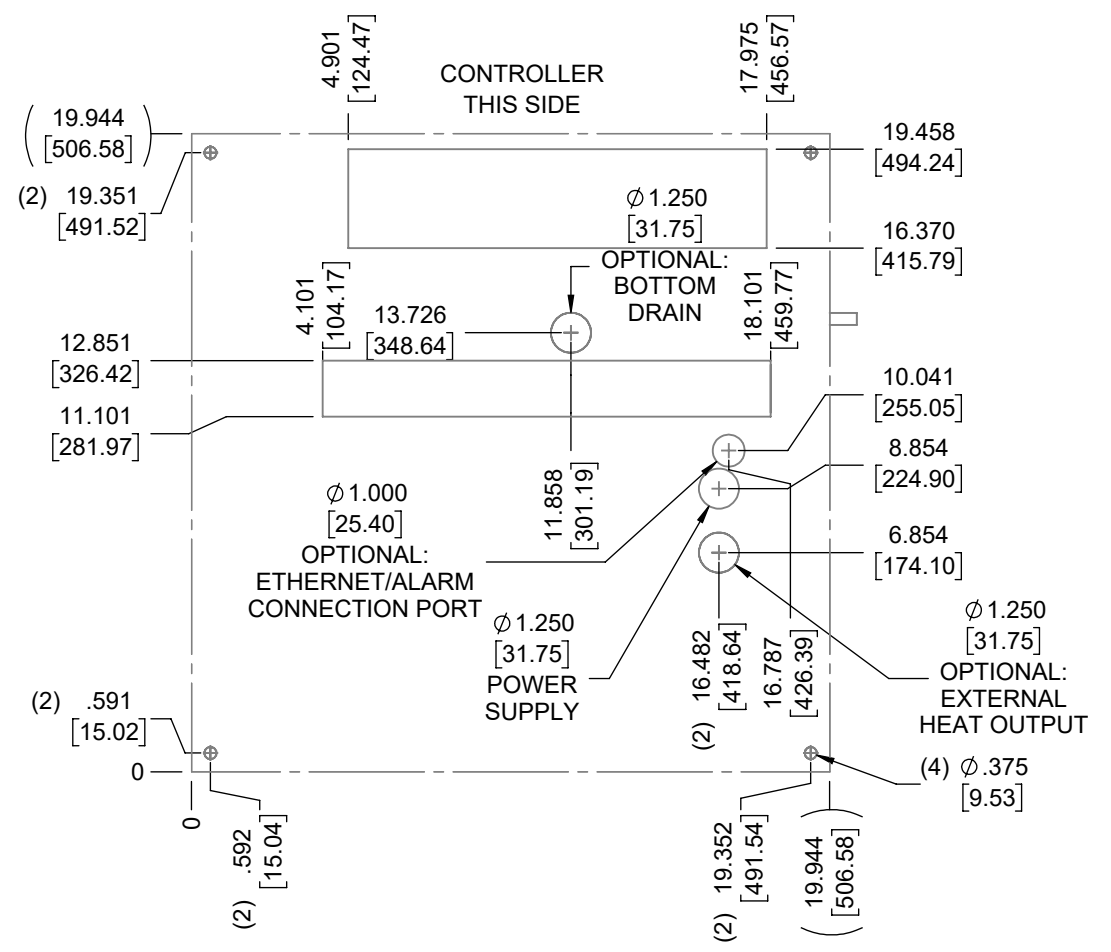

ITEM NUMBER N/A	USED ON IQ3000T	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 XX ±.030 XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°	<p>ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</p>	
MATERIAL N/A		SURFACE FINISH $\sqrt{63}$ DO NOT SCALE DRAWING DIMENSIONS ARE INCHES		
EST. WT.: lbs	DRAWN BY RCC	DATE 4/19/2017	SCALE 1:6	DESCRIPTION IQ3000T SPEC DRAWING
				DRAWING NUMBER IQ320702
				REV C