


**A IQ3500V**  
 COOLING CAPACITY: 3500 BTUH (1026W) @131°F (55°C)  
 MAXIMUM AMPS: 2.4 (1152W) @480V 60HZ  
 MAXIMUM OPERATING TEMP: 131°F (55°C)  
 MINIMUM OPERATING TEMP: -4°F (-20°C)  
 DIMENSIONS: 32.53" (826MM) H X 19.31" (490MM) W X 6.41" (163MM) D  
 WEIGHT: 119 LBS (54.1KG)

REV	REVISION	CHG	DATE	APP	DATE	CN #
D	CHANGED THERMOSTAT DIMENSIONS	NAT	2/15/2021			EC-1434
C	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	3/29/2018			1351
B	ADDED WATTAGE INFO	RCC	1/3/2018			
A	REDRAWN IN SW	RCC	4/13/2017			


ITEM NUMBER N/A	USED ON IQ3500V
MATERIAL N/A	
EST WT: lbs	
DRAWN BY RCC	DATE 4/13/2017
	SCALE 1:8

UNLESS OTHERWISE SPECIFIED TOLERANCES  
 .X ±.060  
 .XX ±.030  
 .XXX ±.015  
 FRACTIONAL ±1/16  
 ANGULAR ±1/2°  
 SURFACE FINISH 63

**ICE QUBE, INC.**  
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.  
 DESCRIPTION  
**IQ3500V SPEC DRAWING, 480V XP2**  
 DRAWING NUMBER  
**IQ351427**  
 REV  
**D**

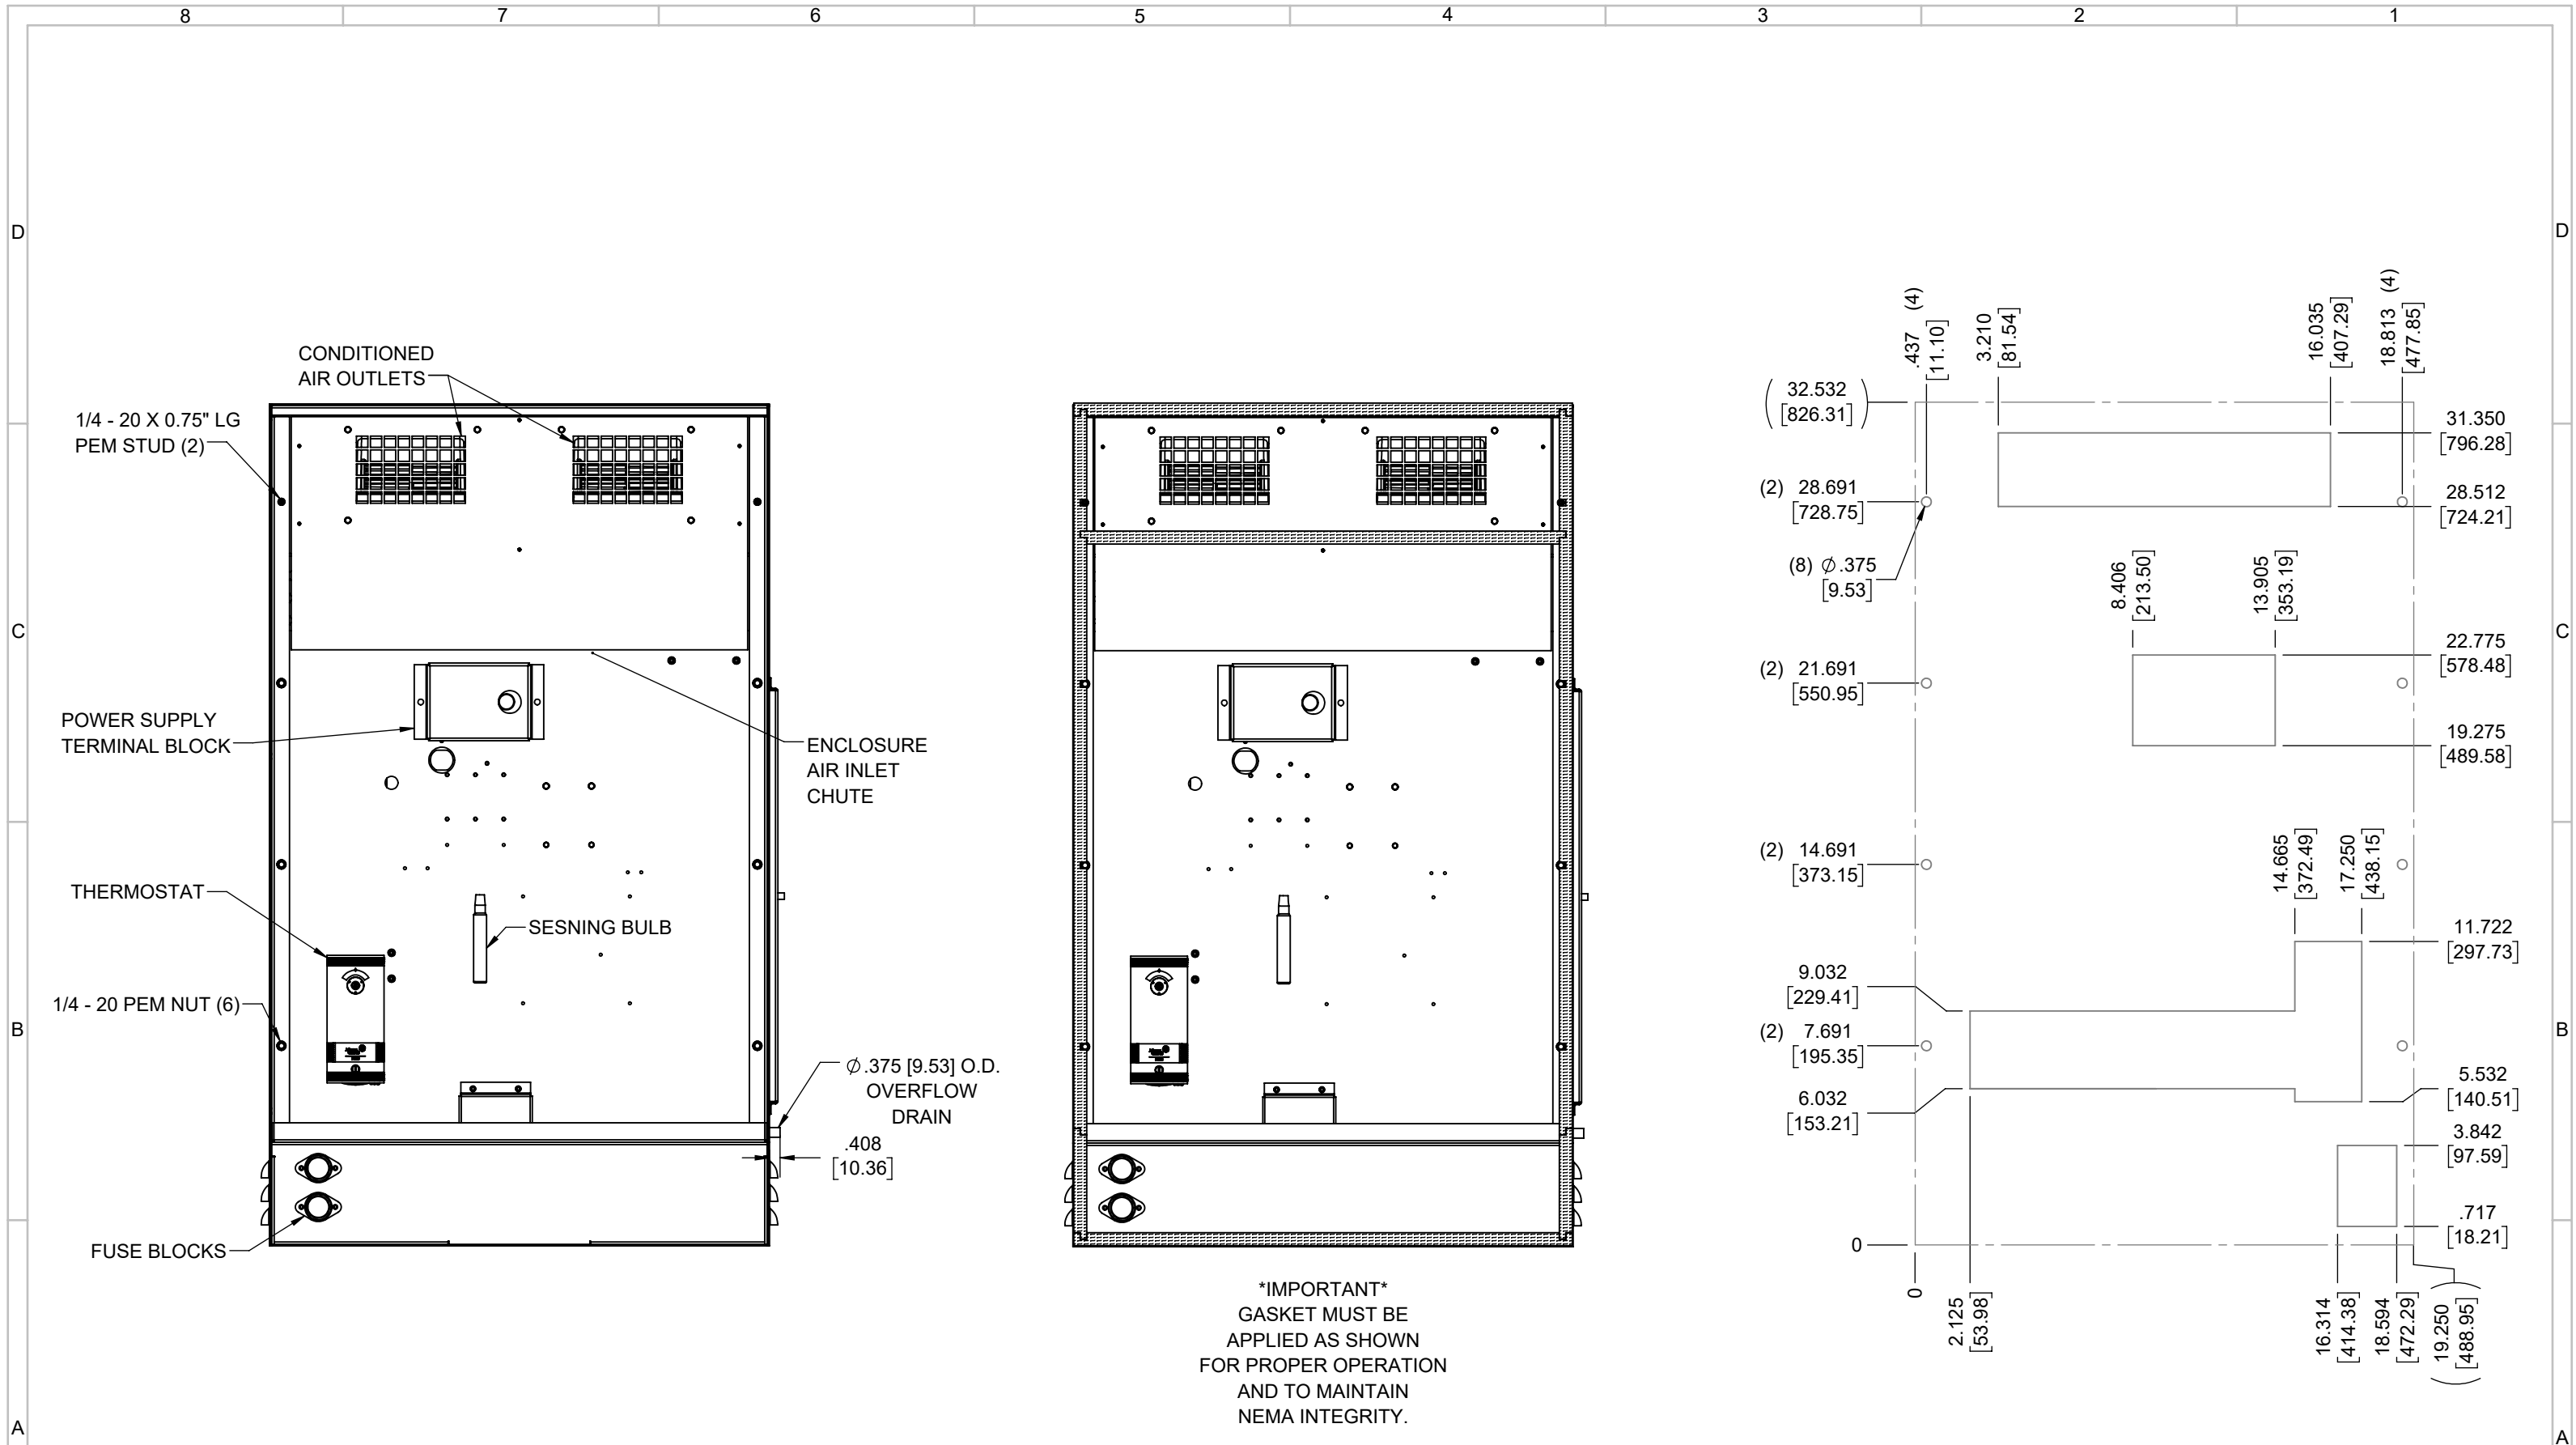

**\*IMPORTANT\***  
 GASKET MUST BE  
 APPLIED AS SHOWN  
 FOR PROPER OPERATION  
 AND TO MAINTAIN  
 NEMA INTEGRITY.

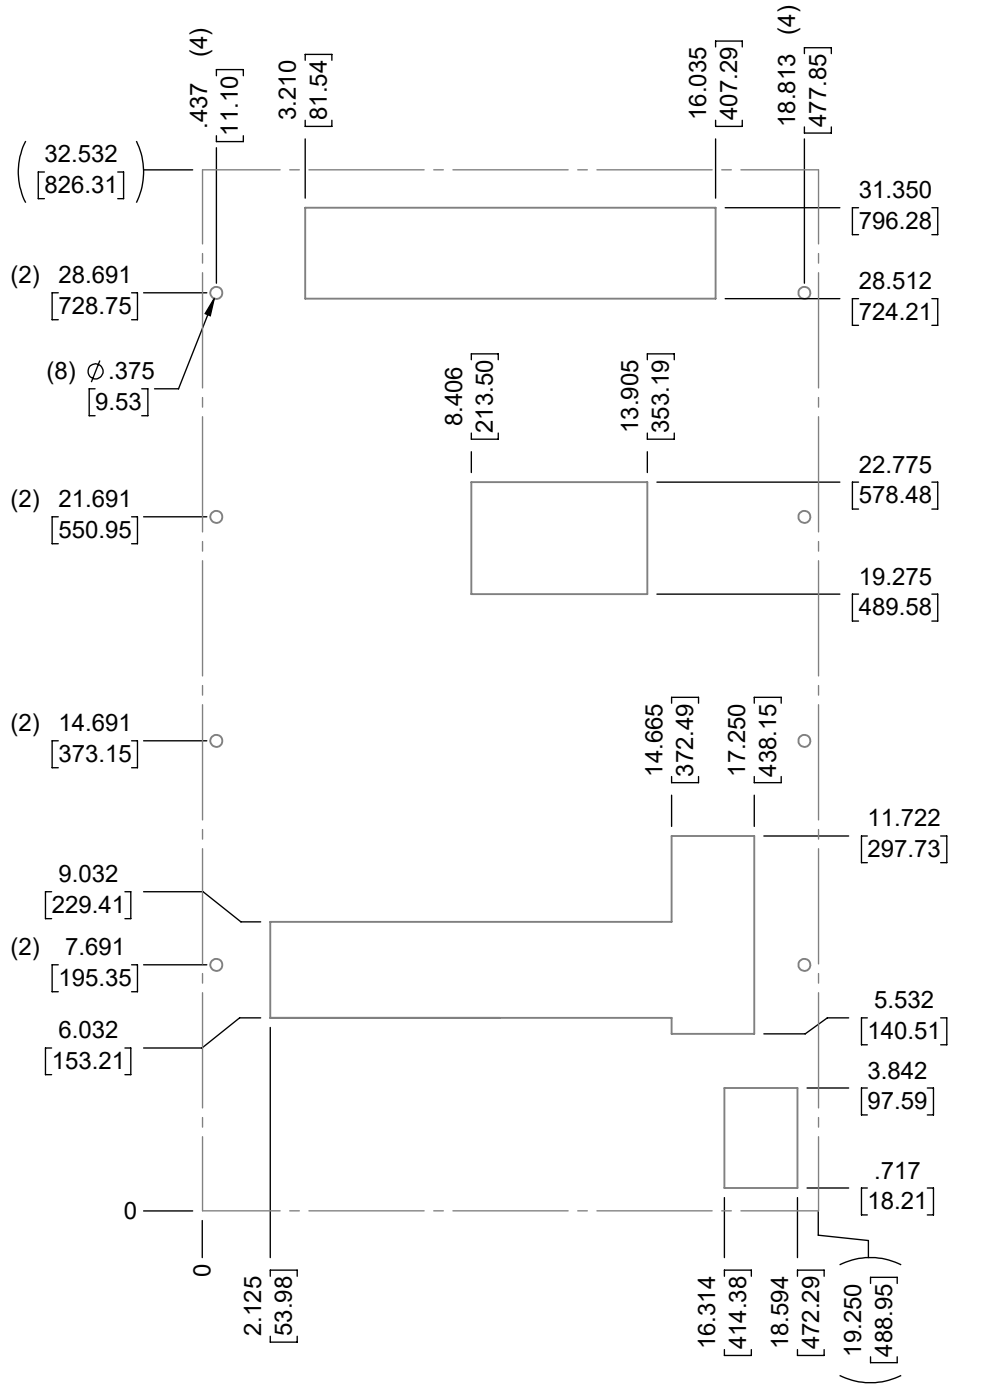

EVAP. OUTLET ≈ 236 CFM  
 COND. OUTLET ≈ 236 CFM  
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 55 dBA  
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 55 dBA  
 CONDENSER INLET MIN. CLEARANCE 2.04"

ITEM NUMBER <i>N/A</i>	USED ON <i>IQ3500V</i>	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°	 <small>THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</small> <b>DESCRIPTION</b> <i>IQ3500V SPEC DRAWING, 480V XP2</i>
MATERIAL <i>N/A</i>		SURFACE FINISH 63	
EST. WT.: lbs		DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	DRAWING NUMBER <b><i>IQ351427</i></b>
DRAWN BY <i>RCC</i>	DATE <i>4/13/2017</i>	SCALE <i>1:6</i>	REV <i>D</i>