



IQ4500T
 COOLING CAPACITY: 4500 BTUH (1320W) @131°F (55°C)
 MAXIMUM AMPS: 8.5 (1020W) @120V/60HZ
 MAXIMUM AMPS: 4.2 (966W) @230V/60HZ
 MAXIMUM OPERATING TEMP: 131°F (55°C)
 MINIMUM OPERATING TEMP: -4°F (-20°C)
 DIMENSIONS: 12.06" (306MM) H X 19.94" (507MM) W X 20.06" (510MM) D
 WEIGHT: 89 LBS (40.5KG)

REV	REVISION	CHG	DATE	APP	DATE	CN #
D	CHANGED THERMOSTAT DIMENSIONS	NAT	2/26/2021			ECN-1434
C	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	3/28/2018			1351
B	ADDED WATTAGE INFO	RCC	1/3/2018			
A	REDRAWN IN SW	RCC	4/18/2017			


ITEM NUMBER	N/A	USED ON	IQ4500T
MATERIAL	N/A		
EST WT:	lbs		
DRAWN BY	RCC	DATE	4/19/2017
		SCALE	1:9

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH	63
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
 DESCRIPTION
IQ4500T SPEC DRAWING XP2
 DRAWING NUMBER
IQ351447
 REV
D

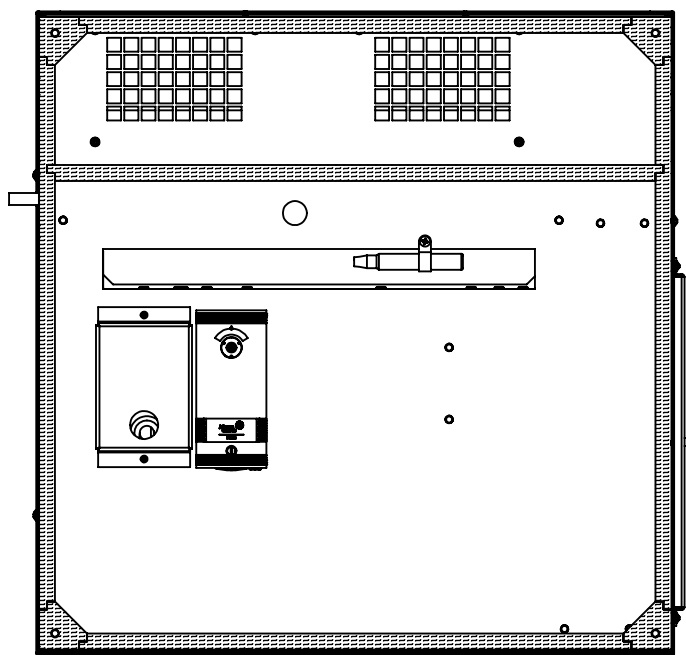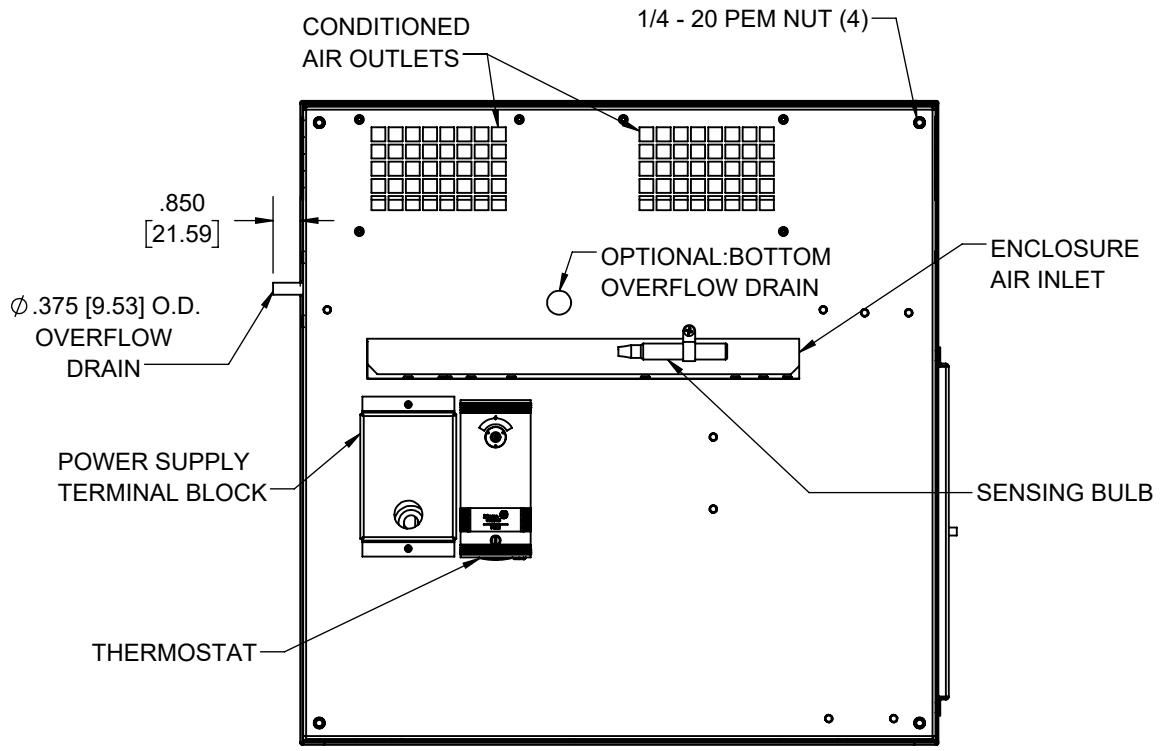

IMPORTANT
 GASKET MUST BE
 APPLIED AS SHOWN
 FOR PROPER OPERATION
 AND TO MAINTAIN
 NEMA INTEGRITY.

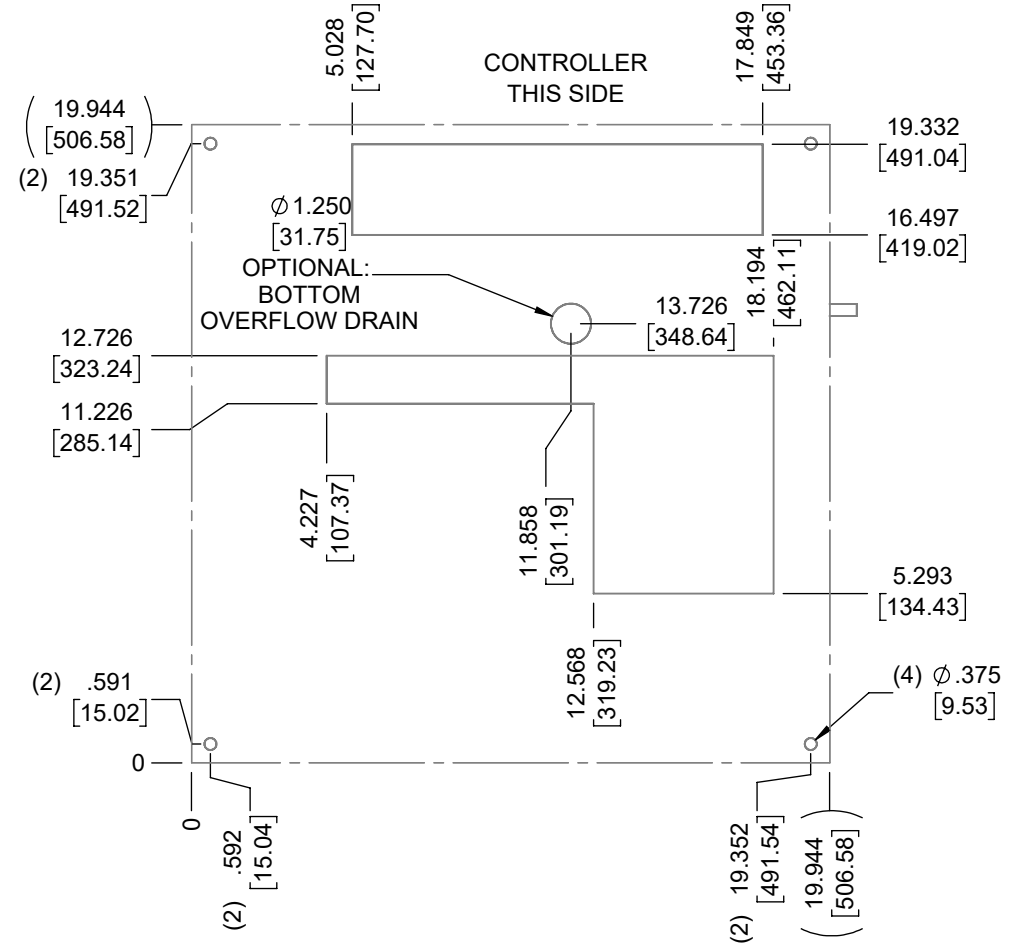

EVAP. OUTLET ≈ 236 CFM
 COND. OUTLET ≈ 410 CFM
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 59 dBA
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 59 dBA
 CONDENSER INLET MIN. CLEARANCE 2.76"

ITEM NUMBER N/A	USED ON IQ4500T	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 .XX ±.030 .XXX ±.015	THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
MATERIAL N/A		FRACTIONAL ANGULAR ±1/4 ±1/2*	
EST. WT.: lbs		SURFACE FINISH 63	DESCRIPTION IQ4500T SPEC DRAWING XP2
DRAWN BY RCC	DATE 4/19/2017	SCALE 1:6	DRAWING NUMBER IQ351447
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES			REV D