



IQ8000T
 COOLING CAPACITY: 8000 BTUH (2346W) @131°F (55°C)
 MAXIMUM AMPS: 12.2 (1464W) @120V/60HZ
 MAXIMUM AMPS: 5.7/5.7 (1311/1254W) @230/220V 60/50HZ
 MAXIMUM OPERATING TEMP: 131°F (55°C)
 MINIMUM OPERATING TEMP: -40°F (-40°C)
 DIMENSIONS: 15.06" (383MM) H X 19.94" (507MM) W X 20.06" (510MM) D
 WEIGHT: 95 LBS (43.2KG)

REV	DESCRIPTION	CHG	DATE	APP	DATE	CN #
C	ADDED CFM, dBA, AND CLEARANCE INFO	RCC	3/23/2018			1351
B	ADDED WATTAGE INFO	RCC	12/29/2017			
A	REDRAWN IN SW	RCC	4/18/2017			


ITEM NUMBER	N/A	USED ON	IQ8000T
MATERIAL	N/A		
EST WT:	lbs		
DRAWN BY	RCC	DATE	4/18/2017
		SCALE	1:8

UNLESS OTHERWISE SPECIFIED TOLERANCES	
.X	±.060
.XX	±.030
.XXX	±.015
FRACTIONAL	±1/16
ANGULAR	±1/2°
SURFACE FINISH $\sqrt{63}$	
DO NOT SCALE DRAWING DIMENSIONS ARE INCHES	

ICE QUBE, INC.
THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.
 DESCRIPTION
IQ8000T SPEC DRAWING
 DRAWING NUMBER
IQ351444

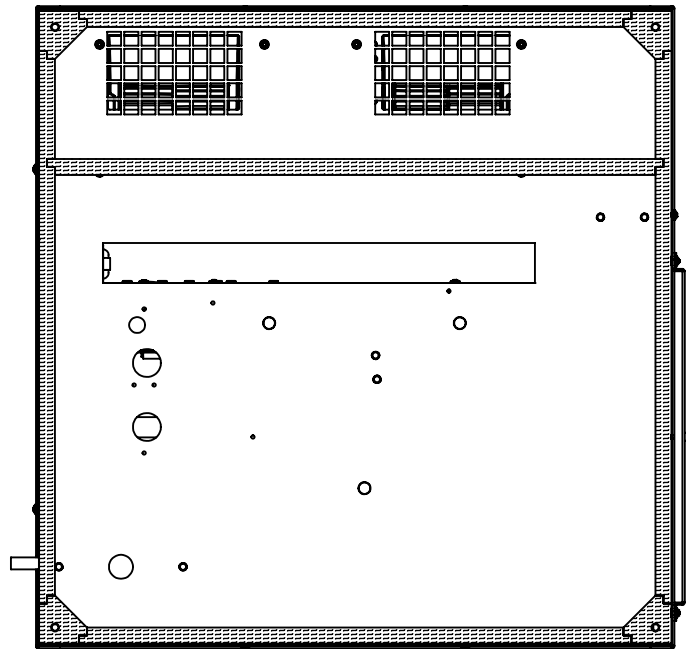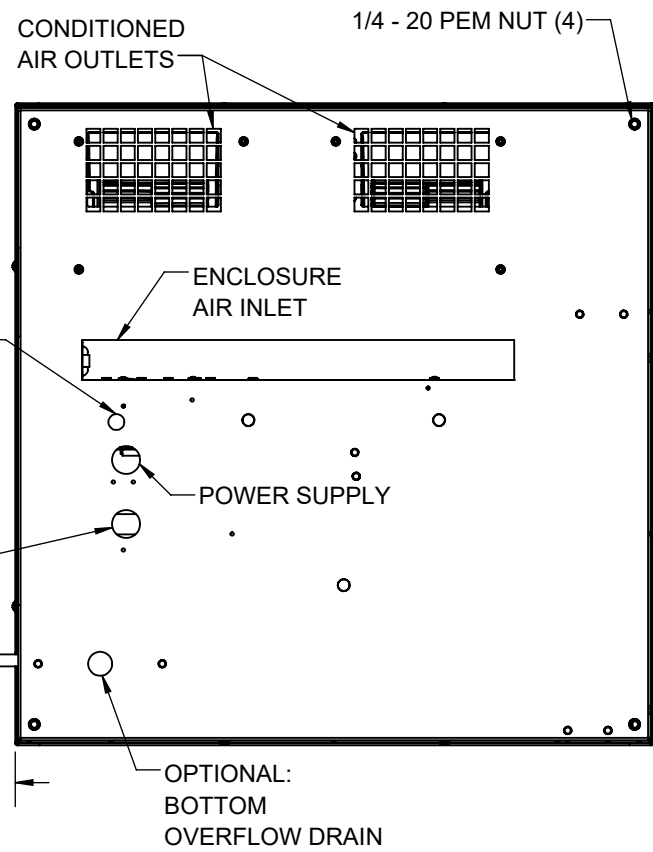

IMPORTANT
 GASKET MUST BE APPLIED AS SHOWN FOR PROPER OPERATION AND TO MAINTAIN NEMA INTEGRITY.

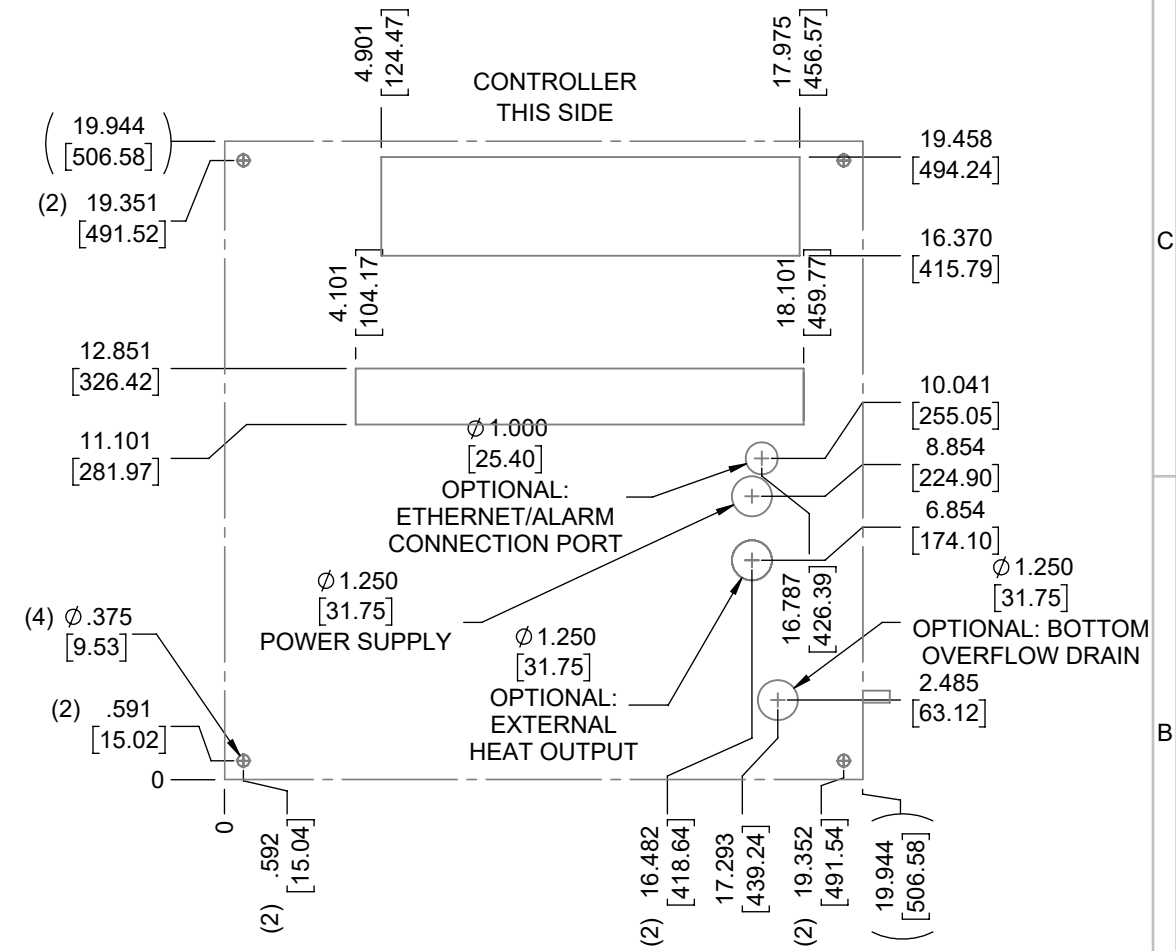

EVAP. OUTLET ≈ 410 CFM
 COND. OUTLET ≈ 410 CFM
 SOUND LEVEL @5FT FROM UNIT @ A HT. OF 3FT = 62 dBA
 SOUND LEVEL @2FT FROM UNIT @ A HT. OF 5FT = 63 dBA
 CONDENSER INLET MIN. CLEARANCE 3.05"

ITEM NUMBER N/A	USED ON IQ8000T	UNLESS OTHERWISE SPECIFIED TOLERANCES X ±.060 XX ±.030 XXX ±.015 FRACTIONAL ±1/4 ANGULAR ±1/2°	<p>ICE QUBE, INC. THIS IS A PROPRIETARY DOCUMENT. DO NOT REPRODUCE OR DISCLOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF ICE QUBE, INC.</p>
MATERIAL N/A		DESCRIPTION IQ8000T SPEC DRAWING	
EST WT: lbs	DATE 4/18/2017	SCALE 1:6	DRAWING NUMBER IQ351444
DRAWN BY RCC			REV C