


**Hazardous Locations, Class 1, Division 2, Group A, B, C and D**  
**CC3065PHL-TYPE 4X, xxx, Class 1/Div 2**  
**COMPACT CABINET COOLER (COPPER CORE)**  
**AIR-TO-WATER FLUSH-MOUNT MODEL**

| Model     | Weight  | Rating<br>@ 20°C ΔT<br>BTU / hr | Amps<br>Current Draw<br>at 115 volts AC | Fan<br>Size | Dimensions-Inches<br>(H x W x D) |
|-----------|---------|---------------------------------|---|-------------|----------------------------------|
| CC3065PHL | 13 lbs. | 9,300                           | 0.36                                    | 1 x 6"      | 30 x 8-3/4 x 4-1/16              |

Efficiency: 68.8 Watts / °C ΔT based on average internal cabinet temperature.

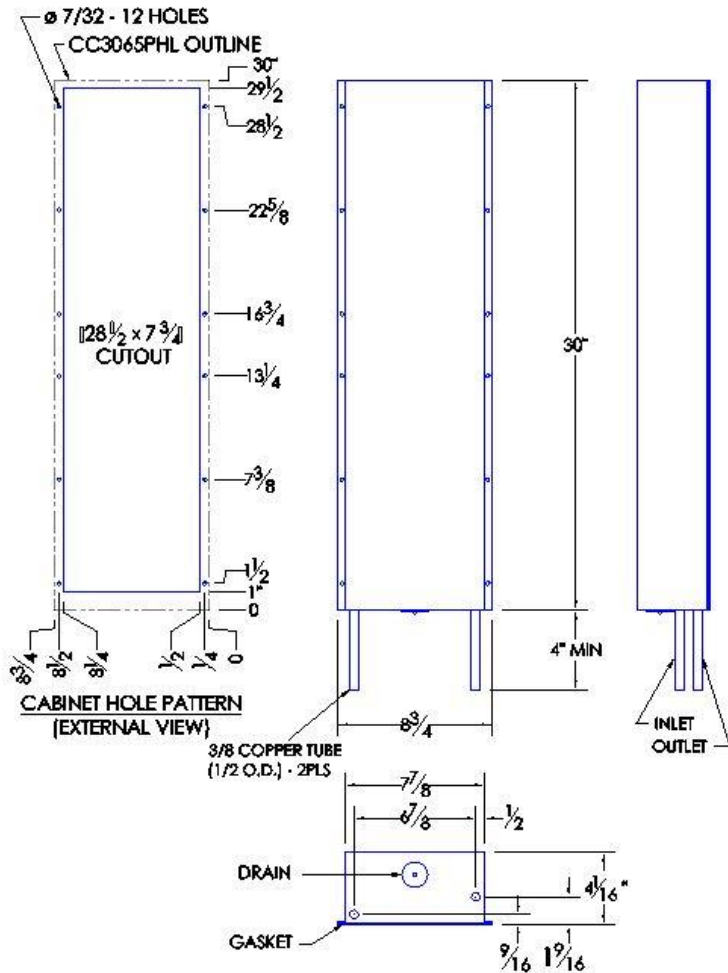

Inside View



Outside View

**SPECIFICATIONS**

1. UL Listed for TYPE 4X environments, Hazard Location Class 1 / Div 2
2. CC3065 Rated cooling: 2,725 Watts mounted to an uninsulated 72" X 36" X 24" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air Temperature (Temp Code T4).
3. Designed for surface mounting on the outside of cabinet.
4. Housing is Stainless Steel (TYPE 316)
5. External water inlet and outlet connections.
6. Equipped with mounting gasket to maintain the TYPE 4X integrity of your cabinet.
7. Pressure tested to insure liquid tight seal.
8. Internal 6-ft power cord.
9. Available with DC and AC (12VDC, 24VDC, 48VDC, 115VAC & 230VAC). Designation xxx indicates voltage.
10. Vertical mounting (as shown) only.
11. Coolant water pressure: Pressure tested to 100 psi. Safe working pressure is 60 psi.
12. Recommended coolant flow rate (gallons per minute): 1 GPM
13. **For design, quote, and sizing assistance: call (888) 754-6329.**



UL File #E468211



Assembled in the USA of Foreign and Domestic Materials



ISO 9001:2008 FM 554949



**Pelmar Engineering Ltd.**

Tel. (888) 754-6329  
sales@pelmareng.com  
www.pelmareng.com

**CC3065PHL-TYPE 4X, xxx,**  
**Class 1/Div 2 (Copper Core)**

CCS-PBD-7.2.2-883621-C