


# Dual Nozzle Cold Air Gun

Models 612, 622, 632

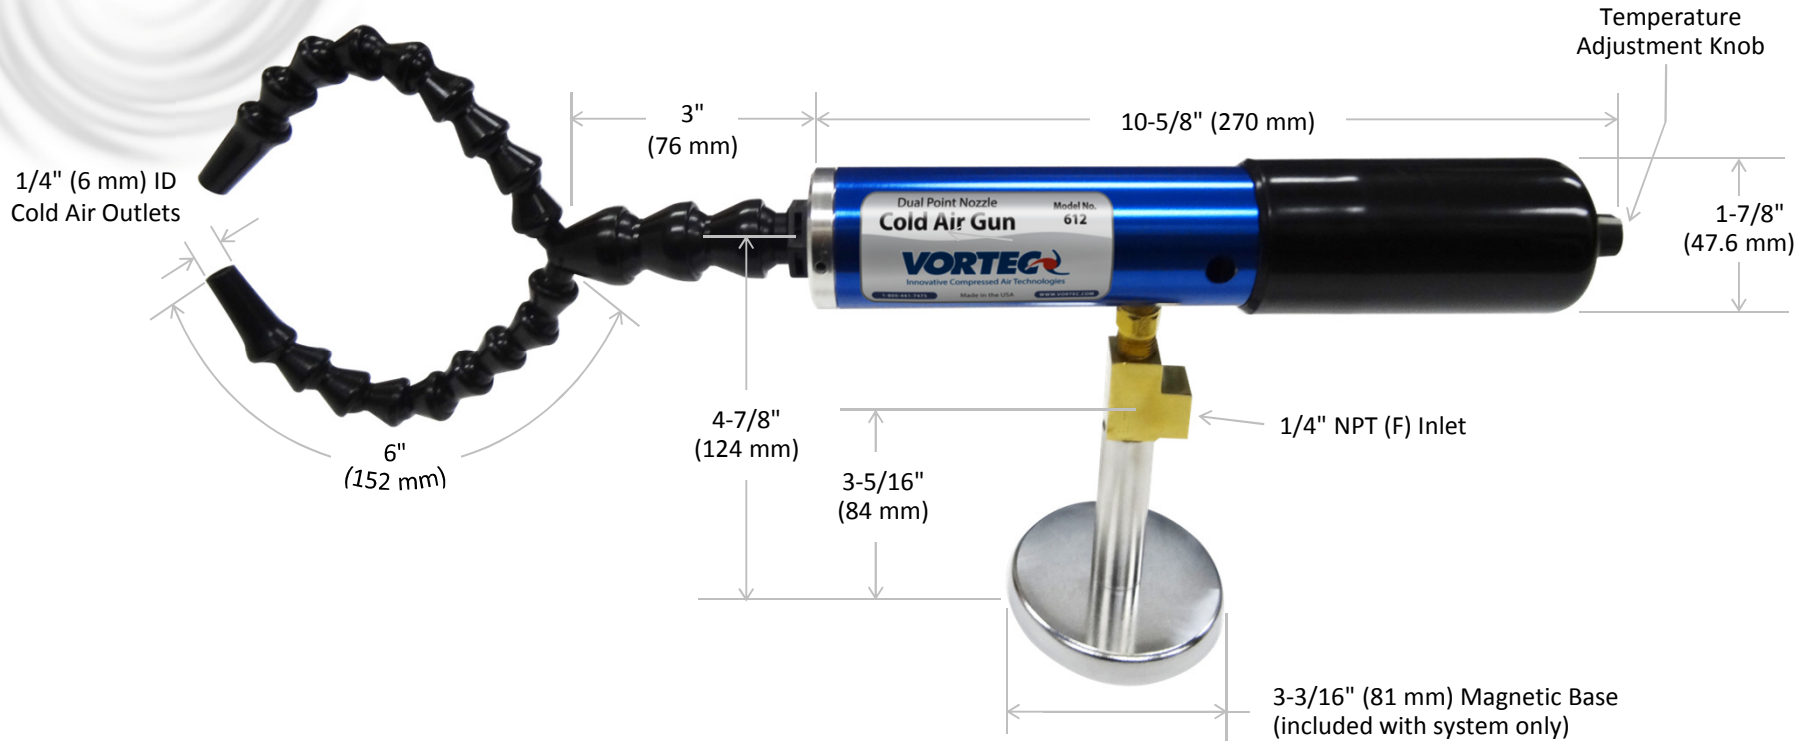

## SPECIFICATIONS

Model No.		Cooling Capacity		Air Consumption		Min. Temp. Achieved		Outlet Air Flow Rate		Weight			
								(Total both nozzles)		System		Gun only	
System <sup>1</sup>	Gun only	Btu/h	Watts	SCFM	SLPM	deg F	deg C	SCFM	SLPM	lb	kg	lb	kg
612	612-1	900	264	15	425	-5	-15	2-15	57-425	3.0	1.4	1.0	0.5
622	622-1	1500	440	25	708	15	-9	8-25	227-708	3.0	1.4	1.0	0.5
632	632-1	2500	733	35	990	25	-4	15-35	425-990	3.0	1.4	1.0	0.5

<sup>1</sup> System includes magnetic base and compressed air filter.

Note: Specifications are for 100 psig (6.9 bar) and 70°F (21°C) compressed air



An ITW Company  
10125 Carver Road  
Cincinnati, OH 45242

1-800-441-7475  
sales@vortec.com  
www.vortec.com