


# Dual-Force Vac Drum Pump

Model 2109

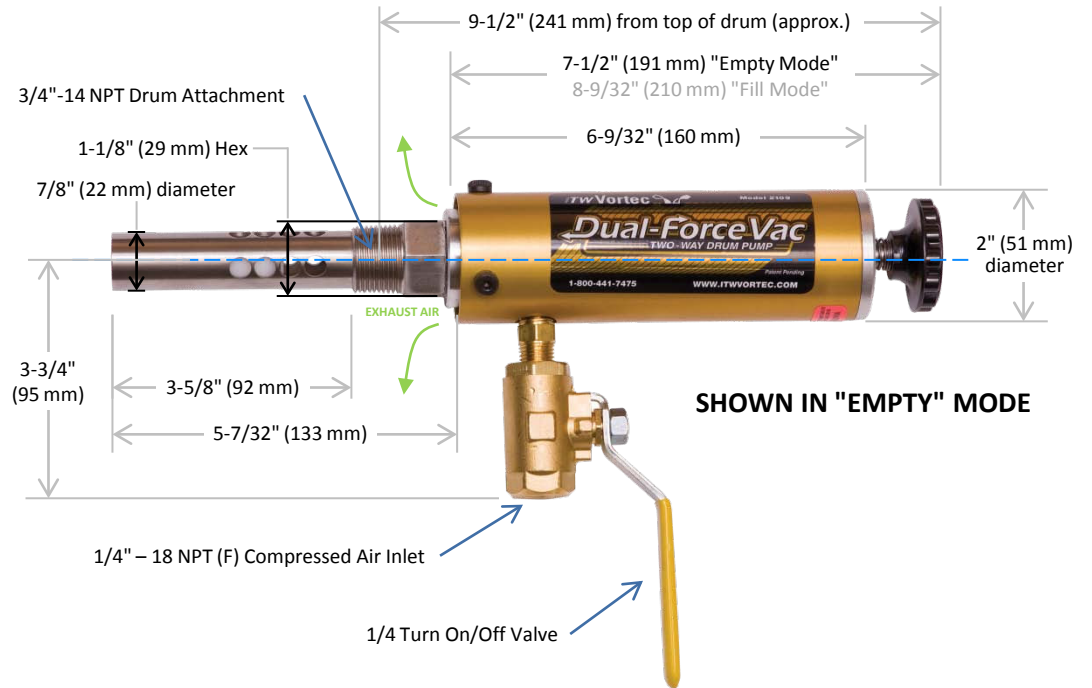

SPECIFICATIONS												
Product	Compressed Air Pressure <sup>1</sup>		Air Consumption		Vacuum		Fill Rate <sup>2</sup>		Empty Rate <sup>2</sup>		Weight	
	psig	bar	scfm	slpm	inch of Hg	kPa	gal per min	li per min	gal per min	li per min	lbs	kg
2109	50	3.5	15	425	6.7	22.7	29.5	112	37	140	10	4.5
	100	6.9	23	651	9.5	32.2	33	125	33	125		

<sup>1</sup> Do not operate the Dual Force Vac Drum Pump at less than 50 psig

<sup>2</sup> Flow rates are based on a liquid viscosity of 0.8 cPs

<sup>3</sup> Also includes 5 micron compressed air filter (not shown)



**Pelmar Engineering Ltd.**  
 Tel. (888) 754-6329, (416) 288-1736  
 E-mail: sales@pelmareng.com  
 Web site: www.pelmareng.com